

DLR5640-WN

■ Screw Fastening Counter

Features

The self-adjustable timer function automatically assesses the time required to complete fastening each screw and reflects it on the judging time setting.

- Ideally suited for the assembly lines of vehicles and electrical equipment requiring reliable screw fastening.
- The controller receives signals from electric screwdrivers to provide highly reliable screw fastening control.
- Functions of the controller and counter are integrated into a single unit.
- Count Return Function: When a screw is loosened, a reverse signal output from the electric screwdriver reverses the count by one.
- The self-adjustable timer function automatically assesses the time required to complete tightening each screw and reflects it on the judging time setting.
- The Count Correction Function does not count elevated screws or double fastening as fastening errors.
- External Count Function: To be available to various assembling jobs, the DLR5640 enables counting of two kinds of parts (up to 9 counts each) in addition to the screw tightening counting. These kinds of counting can be used together.
- Link Connection Function: You can build up a simple sequential screw tightening system by connecting the DLR5640 screw tightening counters in series without using any external controller such as a programmable controller.
- Driver Lock Function prevents unexpected start of screwdrivers.
- Desktop or wall-hung installation is available.
- Input voltage range from 100 V AC to 240 V AC is acceptable in any part of the world.



Specifications

Model	DLR5640-WN
Count	1 - 99
Counting Method	Count-up / Count-down
Count Correction Function	Count normal fastening only
Self Adjustable Timer Setting	0.01 to 0.99 second
Work Detection Function	Yes (1 terminal) / No
External Count Input	2 terminals (PARTS A / PARTS B)
Work Installation Timer Setting	0 to 9.5 seconds
OK Output Timer Setting	0 to 9.5 seconds
NG Alarm	ON(1) / ON(2) / OFF
OK Buzzer	ON(1) / ON(2) / ON(3) / OFF
Count Return Function	ON / OFF
NG Judge Timing	WORK SET / DRIVER ON
Automatic / Manual OK Judge	AUTO / MANUAL
Screwdriver Lock Function	ON / OFF
Multiple Link	Up to 10 counters can be connected.
External Inputs on Terminal Block	SENSOR / RESET / LINK-IN / PARTS A / PARTS B
External Outputs on Terminal Block	OK / NG / LINK-OUT
Parameter Memory	Parameters stored in internal nonvolatile memory
Screwdriver Control	SPEED / LINEAR START
Power Supply	100 - 240 V AC, 50/60 Hz
Screwdriver Power Supply	33 V DC, 1.5 A
External Dimensions (mm)	W101 × D140 × H57
Mass (kg)	0.8
Accessories	Power cord with U.S.A plug (2 m) Suspension bail (2 pcs.)

Screw Counter





▲ Example of use together with a sensor available in the market



▲ The example of installation

Front and Rear Panels

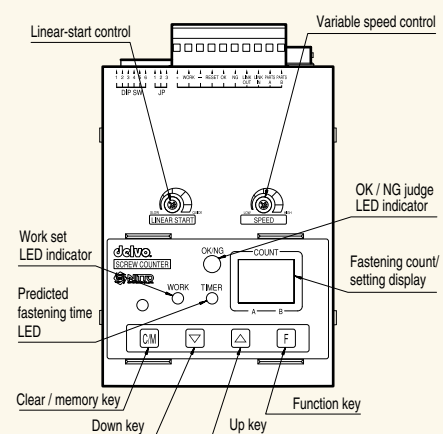

LINK Function (Common to DLR5040A & DLR5640)

When counters are connected by way of LINK connection, the screwdrivers excluding the one to be operated become standby state and cannot be operated. Whole screw fastening is completed when the screw fastening of the third screwdriver finished.
N.B: Up to 10 counters can be connected.

