

DLV5700series

■ For Miniature Screws (1.0~3.0mm)

Features

For quality improvement and productivity enhancement

- Grounded bit installation mechanism.
- Electro-static discharge (ESD) control.
- Low-shock for tightening (30% less of standard models)
- Low swing bit mechanism
- Ergonomic design
- High-performance DC motor
- New clutch mechanism





Specifications

Model		DLV5720	DLV5720H	DLV5740	DLV5740H	DLV5750	
Electric screwdriver	Starting Method	Lever Start					
	Input Voltage	Supply from the dedicated controller					
	Torque Adjustment	Stepless					
	Torque (N·m)	0.02~0.2		0.15~0.4		0.1~0.55	
	Free Speed (min ⁻¹)	500~750	700~1000	450~600	1200~1800	670~1000	
	Power Consumption (W)	10					
	Screw Size (mm)	Machine Screw	1.0~2.3		1.6~2.6		1.0~3.0
		Tapping Screw	1.0~2.0		1.4~2.3		1.0~2.6
	Bit Type						
	Mass (g)	230			300		
Controller	Model	DLC0350E	DLC0350F	DLC0350G	DLC0950E	DLC0950G	
	Input Voltage (V)	100 VAC	115 VAC	230 VAC	100 VAC	230 VAC	
	Power Supply Plug	Asia+Grounding Wire	USA	UK	Asia+Grounding Wire	UK	
	Mass (g)	900			1800		


Standard Accessories

No.	DLV5720	DLV5720H	DLV5740	DLV5740H	DLV5750
Bit	No.0 x 1.8 x 44	1			
	No.0 x 2.5 x 44	1		1	
	No.1 x 4 x 44			1	
Connection Cable (1.5M)DLW9081	1			1	
Suspension bail	1			1	
Spring for Low Torque	1				

Torque Diagrams (for reference)

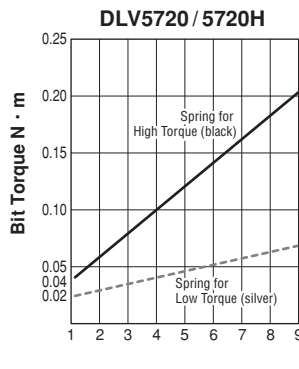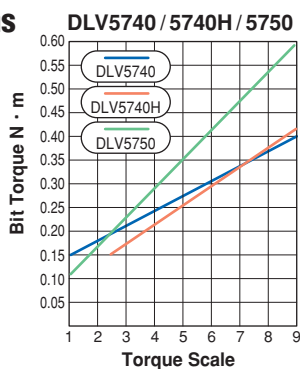


Optional Accessories

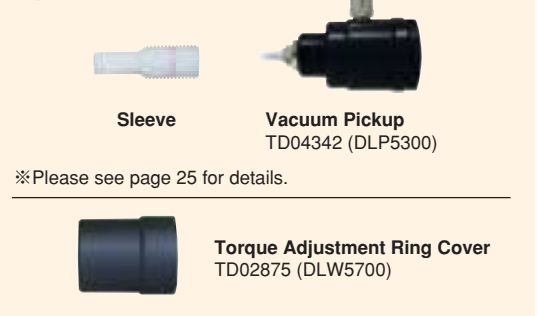


External Dimensions


DLV5720 / 5720H / 5740

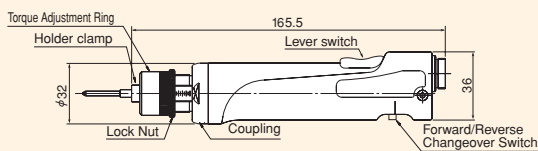


DLV5740H / 5750

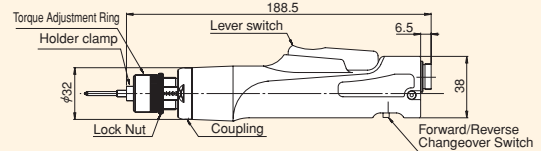

DLC0350

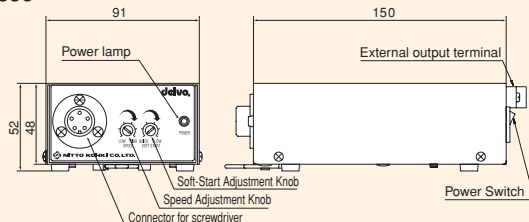

DLC0950

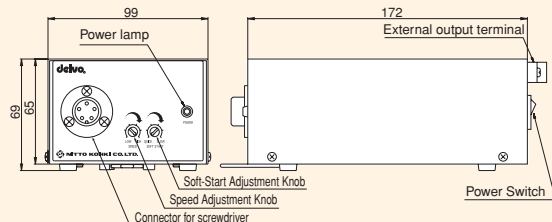

Unit: mm