

DLV5800series

■ For Miniature Screws (1mm~2.6mm)

Features

In response to the needs of cell production system space-saving DELVO screwdrivers are released.

Controller is designed for emphasis on space-saving size and lightness.

- Clear disengagement of clutch (low-shock mechanism unavailable)
- Grounded bit installation mechanism
- Complied with EN100015-1
- New lever is adopted.
- Low swing bit mechanism
- Low voltage transless controller



DLV5820 / 5820H / 5840

DLC0250E

Specifications

Model	DLV5820	DLV5820H	DLV5840
Starting Method		Lever Start	
Input Voltage	Supply from the dedicated controller		
Torque Adjustment	Stepless		
Torque (N·m)		0.02-0.20	0.15-0.40
Free Speed (min ⁻¹)	750	1,000	600
Power Consumption (W)	10		
Screw Size	Machine Screw Tapping Screw	M1.0~2.3 M1.0~2.0	M1.6~2.6 M1.4~2.3
Bit Type (mm)			
Mass (kg)	0.23		
Cord length (m)	1.5 (with connector)		
Grounding bit feature	Equipped as standard		



Model	DLC0250E
Input Voltage	100VAC, 50/60Hz
Function	Automatic stop Grounded Bit Installation Mechanism
Mass (kg)	0.3
Power Supply Plug	UL plug
Case material	Antistatic material

* Electric screwdrivers DLV5800 series can be also used with DLC0350 & DLC0950.

Standard Accessories

No.	DLV5820	DLV5820H	DLV5840
No.0 x 1.8 x 44	1	-	-
No.0 x 2.5 x 44	1	-	1
No.1 x 4 x 44	-	-	1
Suspension ball	1	-	1
Connection cable (1.5M)	1	-	1
Spring for low torque (Silver)	1	-	-

Torque Diagrams (for reference)

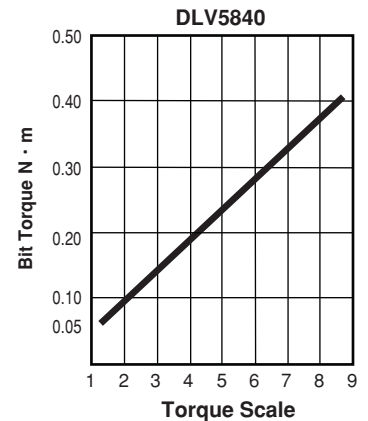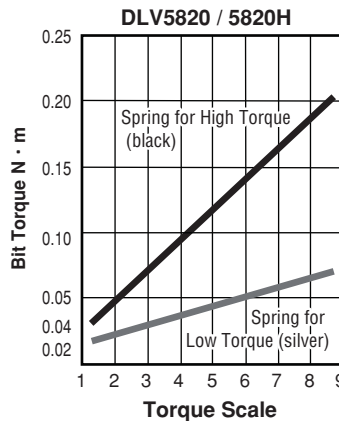


Optional Accessories




External Dimensions

●DLV5820 / 5820H / 5840

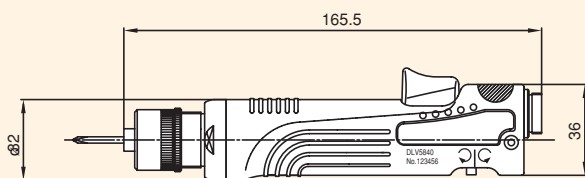

●DLC0250E

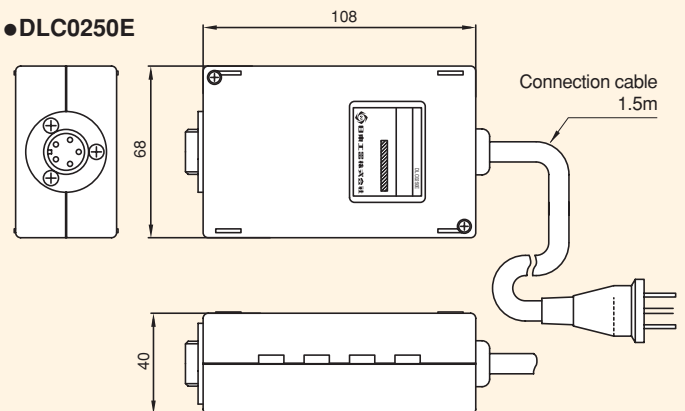

Unit: mm

DLV5800series