

# DLV7800series

■ For Miniature Screws (1mm~3mm)

## Features

Space saving model with compact controller for low torque

- Small size and light weight.
- Bit earth model available.
- Torque adjusting ring cover is attached as standard.  
(for DLV7810 series)



## Specifications

		Standard		with Bit Ground	
Screwdriver	Model	DLV7810-EMN	DLV7820-EMN	DLV7810-SB	DLV7820-SB
	Starting Method	Lever Start			
	Torque Adjustment	Stepless			
	Torque (N·m)	0.02~0.15	0.13~0.50	0.02~0.15	0.13~0.50
	Free Speed (min <sup>-1</sup> )	1,000			
	Power Consumption (W)	Approx.25			
	Screw Size (mm)	Machine Screw Tapping Screw	Up to 2 Up to 1.7	1~3 1.2~2.6	Up to 2 Up to 1.7
Bit Type (mm)					
Mass (g)	350				
Controller	Model	DLC2110-EN		DLC2110-ENB	
	Input Voltage	100 VAC, 50/60Hz			
	Shape of Plug for Power Supply	Asia		USA	
	Mass (g)	90			

## Standard Accessories


Bit	No.	DLV7810	DLV7820
Bit	No.0 x 1.8 x 44	1	—
	No.0 x 2.5 x 44	1	1
	No.1 x 4 x 44	—	1
Suspension Bail		1	

## Controller



N.B., controller does not come with screwdriver.

## External Dimensions

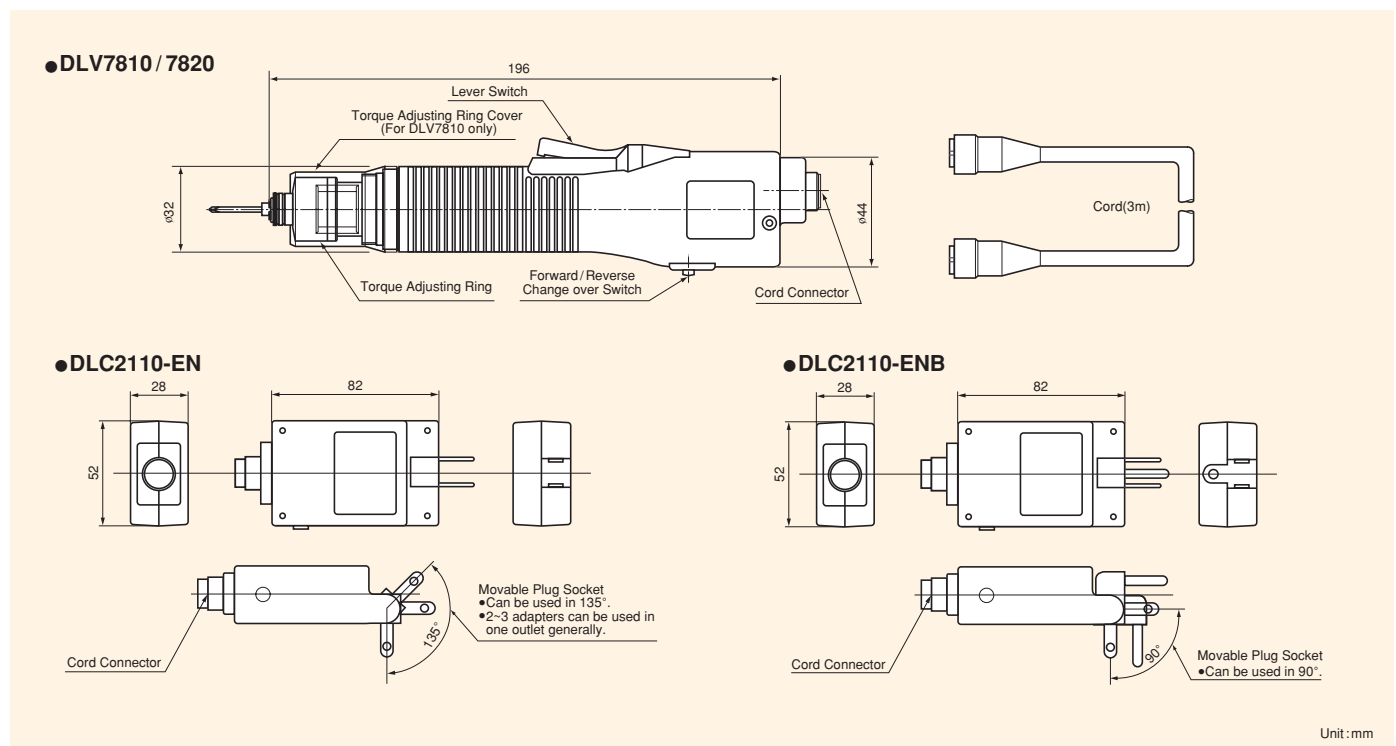

Unit:mm