

Accessories

Tool Balancer RWseries



Easy to adjust tension by using handle.

Model	TW-1R	RW-3	RW-5
Capacity (kg)	0.2 ~ 1.5	1.0 ~ 3.0	2.5 ~ 5.0
Stroke (m)	1.5	2	
Mass (kg)	0.3	0.7	0.9

Vacuum Pump DLP2500series



Reduces manual screw handling, thus improving operational efficiency. To connect the pump, just attach the tube to the nozzle.

Model	DLP2530	DLP2570
Voltage	100VAC, 50/60 Hz	230VAC, 50/60Hz
Power Consumption (W)	30(50Hz), 26(60Hz)	
Achievable Vacuum (-KPa)	-33.3	
Flow Rate (at Outlet) (ℓ/mm)	24	
Screw Size (mm)	4 or less	
Mass (kg)	3.8	

Pistol Grip DLW2300/2300ESD


(for 7100, 7200, 8100, 8200, 7500, 7600, 8500 and 8600 Series Electric Screwdrivers)



Easy-to-attach grip suitable for horizontal operation.

Shaker Box made of anti-electrostatic resin

(for 2,3 and 4mm Screws)

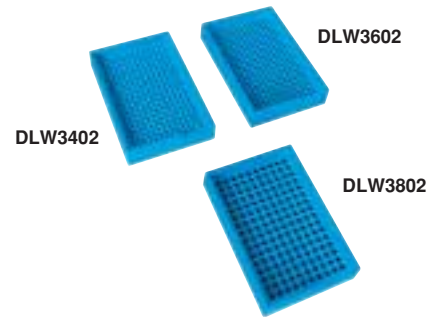

The screws will fall into the heads-up position for easier vacuum or magnetic pickup.

The anti-electrostatic resin greatly reduces static build-up and dust attached to the shaker box.

Model	DLW3402	DLW3602	DLW3802
Part No.	TD04110	TD04111	TD04112
Hole Pitch (mm)	6	6	8
Hole Depth (mm)	13.5	13.5	12.5
No. of Holes	273	273	160
Screw Size (mm)	1.7 ~ 2	2 ~ 2.6	3 ~ 4

Torque Adjustment Ring Cover



Fits over torque adjustment ring to minimize tampering or accidental turning once torque is set.

Part No.	Model	Applicable Screwdriver
TD00331	DLW5200	7100, 7200, 8100 and 8200 series
TD00332	DLW5300	7301, 7000, 8000 series (for 4mm bit)
TD01883	DLW5400	7300 series (for 6.35mm bit)
TD00333	DLW5500	7303 series (for 4mm & 6.35mm bit)
TD00334	DLW5600	7500, 8500 series
TD02875	DLW5700	7410

Flanged Coupling DLW9011

(for 7100, 7200, 8100 and 8200 Series Electric Screwdrivers)



Provides a flange which enables the operator to apply axial pressure through the heel of the hand.