


Torque Diagram (for reference)

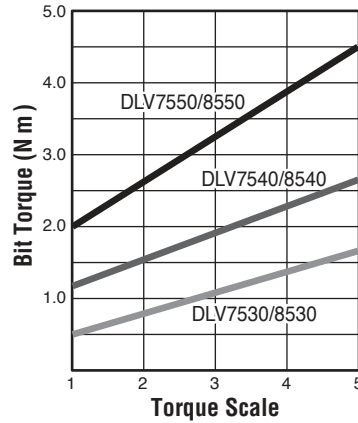

Specifications

Model	DLC4511-GGB	DLR1510-JE
Function	Stepless speed adjustment 80 - 100 % Soft start: adjustable time setting of slow speed (max. 3 sec.) External output signals: start and torque up Electro-static discharge(ESD) control	Screw counting: OK lamp and buzzer for notification Variable non-operation time Setting protection by key lock switch Setting by touch switch for easy operation External output signals: Start, Torque up, Count up & Cycle OK
Input Voltage	230 V AC, 50/60 Hz	
Mass (kg)	3.5	5.1
Plug Shape	Europe 	

External Dimensions

