

LINEAR


Compressor **LOW pressure**
MOTOR FREE PISTON SYSTEM



Ac0401A


Airflow & Power Consumption

Specifications

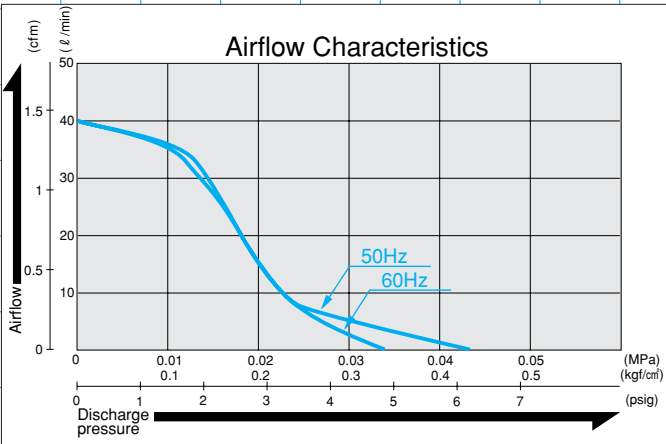


	(SI)	(EURO)	(U.S.A.)
Rated Pressure	0.01 MPa (0.1 kgf/cm ²)	0.1 bar	1.42 psig
Rated Airflow	35 ℓ /min		
Rated Voltage	120 V, AC or 230 V, AC		
Maximum Pressure	0.035 MPa (0.35 kgf/cm ²)	0.35 bar	4.98 psig
Power Consumption	35 W or 38 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	10,000 hours		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL) or B for UL		
Mounting Dimensions	68 (L) x 84 (W) mm		
Gross Weight	1.9 kg	4.2 Lbs.	
Leadwire Length	200 mm	7-7/8"	


* Life expectancy is the expected accumulated period of time during which the compressor will maintain the above specifications. Contact your supplier for details of the conditions of use under which the values and numbers stated herein are maintained.

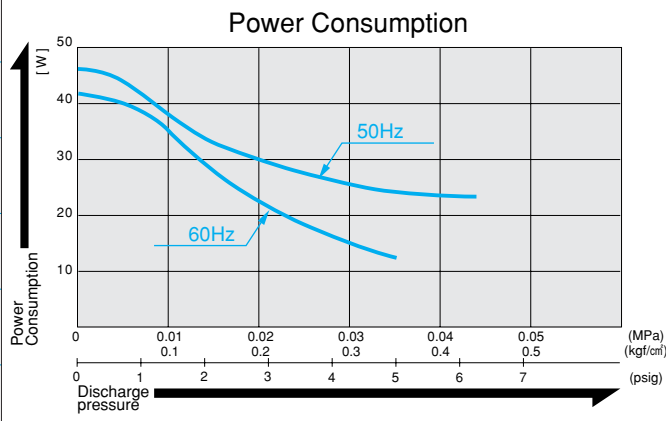

Application Examples



Bed Sore Prevention Mattress

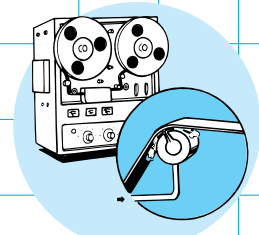

Air Bearing

Sketch Drawing and Mounting Dimensions Diagram (mm)

