


# LINEAR

# VP0140






MOTOR FREE  
PISTON SYSTEM

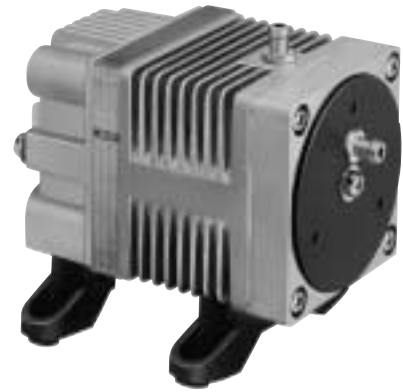

### Airflow & Power Consumption


### Specifications

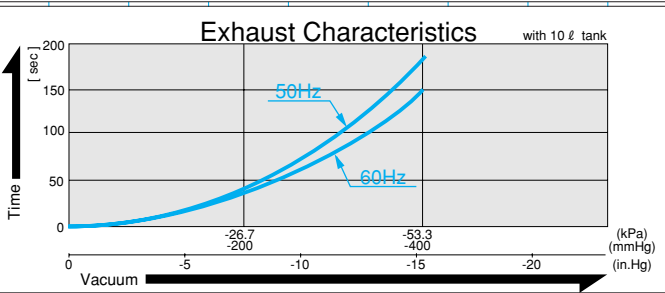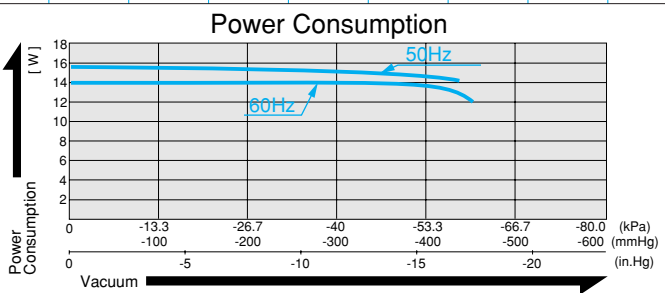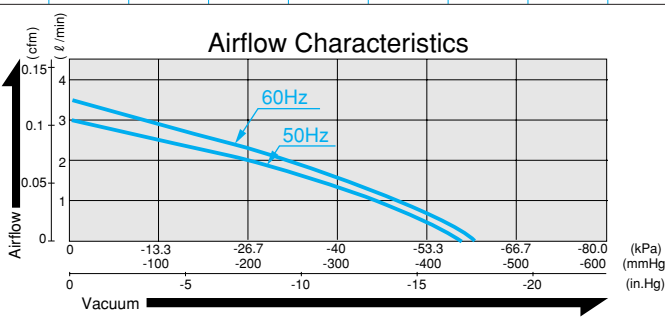


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-53.3 kPa (-400 mmHg)	-533 mbar	-15.7 in.Hg
Free Air Displacement	3 l / min		0.106 cfm
Rated Voltage	115 V, AC or 230 V, AC		
Power Consumption	14 W or 15 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	3,000 hours		
Inlet	6 mm O.D. hose nipple		
Outlet	6 mm O.D. hose nipple		
Duty Cycle	60 minutes		
Coil Insulation Class	E or its equivalent (JETL) and B for UL		
Mounting Dimensions	48 (L) x 62 (W) mm		
Gross Weight	0.7 kg		1.54 Lbs.
Leadwire Length	200 mm		7-7/8"

\* Life expectancy is the expected accumulated period of time during which the compressor will maintain the above specifications. Contact your supplier for details of the conditions of use under which the values and numbers stated herein are maintained.

### Application Examples



Page Scroller



Solder Fume Suction

### Sketch Drawing and Mounting Dimensions Diagram (mm)

