

LINEAR




VP0625



MOTOR FREE
PISTON SYSTEM



Airflow & Power Consumption

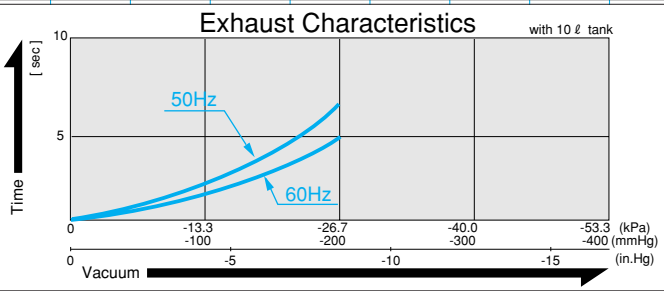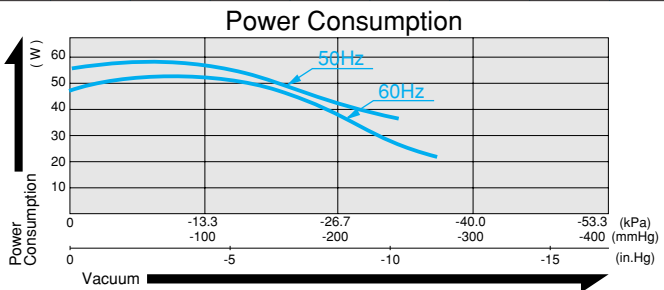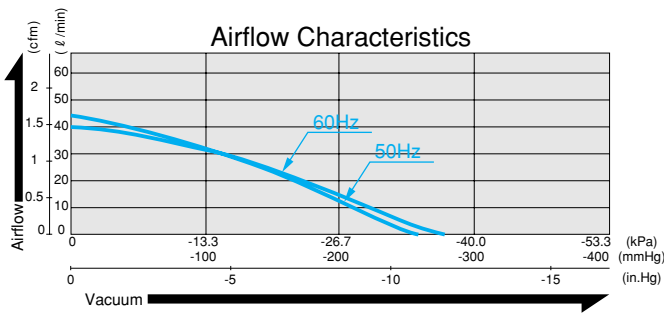


Specifications


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-33.3 kPa (-250 mmHg)	-333 mbar	-9.84 in.Hg
Free Air Displacement	40 l/min		1.41 cfm
Rated Voltage	115 V, AC or 230 V, AC		
Power Consumption	56 W or 60 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	10,000 hours		
Inlet	15 mm O.D. hose nipple		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL) or B for UL		
Mounting Dimensions	68 (L) x 84 (W) mm		
Gross Weight	3 kg		6.6 Lbs.
Leadwire Length	235 mm or 320 mm		9-13/16"

* Life expectancy is the expected accumulated period of time during which the compressor will maintain the above specifications. Contact your supplier for details of the conditions of use under which the values and numbers stated herein are maintained.

Application Examples



Microfiche Camera



Solar Collection Screen

Sketch Drawing and Mounting Dimensions Diagram (mm)

