

# LINEAR

# VP0660






MOTOR FREE  
PISTON SYSTEM



### Airflow & Power Consumption


### Specifications

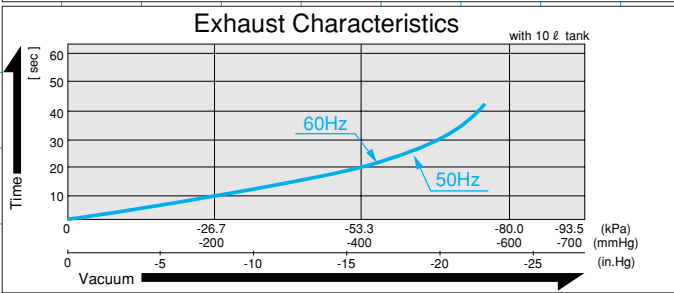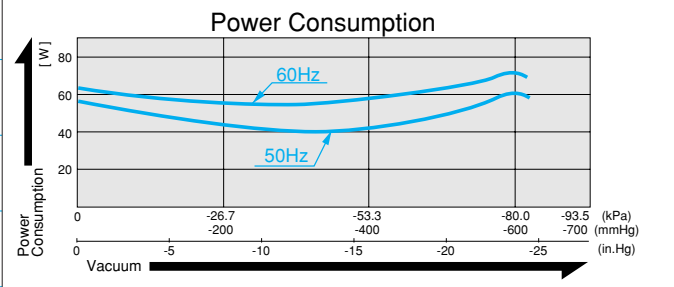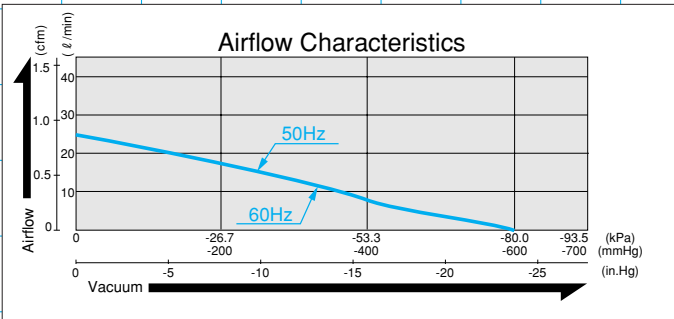


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-80 kPa (-600 mmHg)	-800 mbar	-23.6 in.Hg
Free Air Displacement	25 l/min		0.88 cfm
Rated Voltage	115 V, AC or 230 V, AC		
Power Consumption	70 W or 60 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	6,000 hours		
Inlet	ISO Rc 1/4 (female threaded)		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL) or B for UL		
Mounting Dimensions	102 (L) x 130 (W) mm		
Gross Weight	5 kg		11 Lbs.
Leadwire Length	300 mm or 600 mm		5-7/8"

\* Life expectancy is the expected accumulated period of time during which the compressor will maintain the above specifications. Contact your supplier for details of the conditions of use under which the values and numbers stated herein are maintained.

### Application Examples



Material Handling Machine



Vacuum Chucking

### Sketch Drawing and Mounting Dimensions Diagram (mm)

