




LINEAR

Compressor **TWIN**
MOTOR FREE
PISTON SYSTEM



VP0660x2

Airflow & Power Consumption

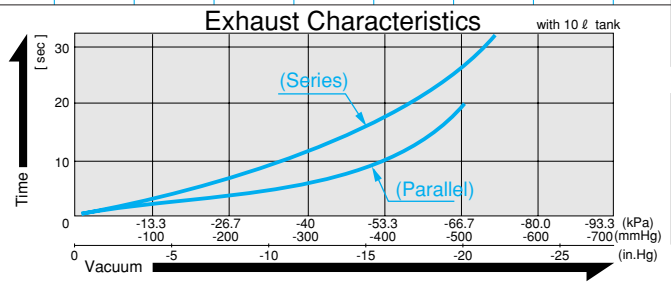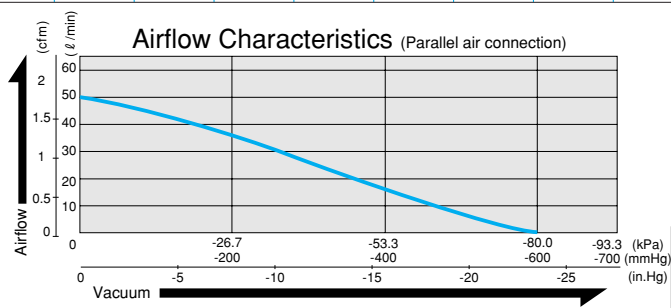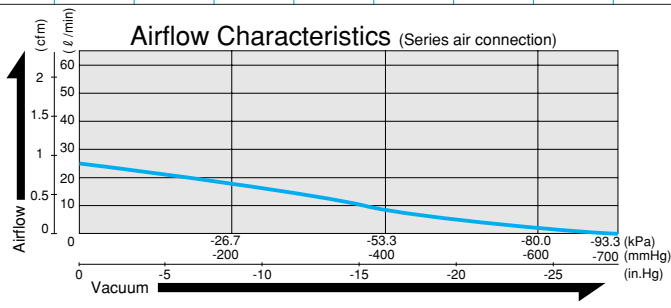


Specifications

	Series Connection	Parallel Connection
Attainable Vacuum	-93.3 kPa (-700 mmHg) -933 mbar or -27.5 inHg	-80 kPa (-600 mmHg) -800 mbar or -23.6 inHg
Free Air Displacement	25 l/min or 0.88 cfm	50 l/min or 1.76 cfm
Rated Voltage	115 V, AC or 230 V, AC	
Power Consumption	125 W or 100 W	
Rated Frequency	60 Hz or 50 Hz	
Life Expectancy	6,000 hours	
Inlet	ISO Rc 1/4 (female threaded); 2 ports	
Outlet	ISO Rc 1/4 (female threaded); 2 ports	
Duty Cycle	Continuous	
Coil Insulation Class	B or its equivalent (JETL)	
Mounting Dimensions	280 (L) x 130 (W) mm	
Gross Weight	10 kg (22 Lbs.)	
Leadwire Length	150 mm (5-7/8")	


* Life expectancy is the expected accumulated period of time during which the compressor will maintain the above specifications. Contact your supplier for details of the conditions of use under which the values and numbers stated herein are maintained.

Application Examples


Series Connection



Parallel Connection



Air line connection performed by user.



Sketch Drawing and Mounting Dimensions Diagram (mm)

