

VACUUM PUMP

LINEAR




MOTOR FREE
PISTON SYSTEM



VP0435A

Airflow & Power Consumption


Specifications

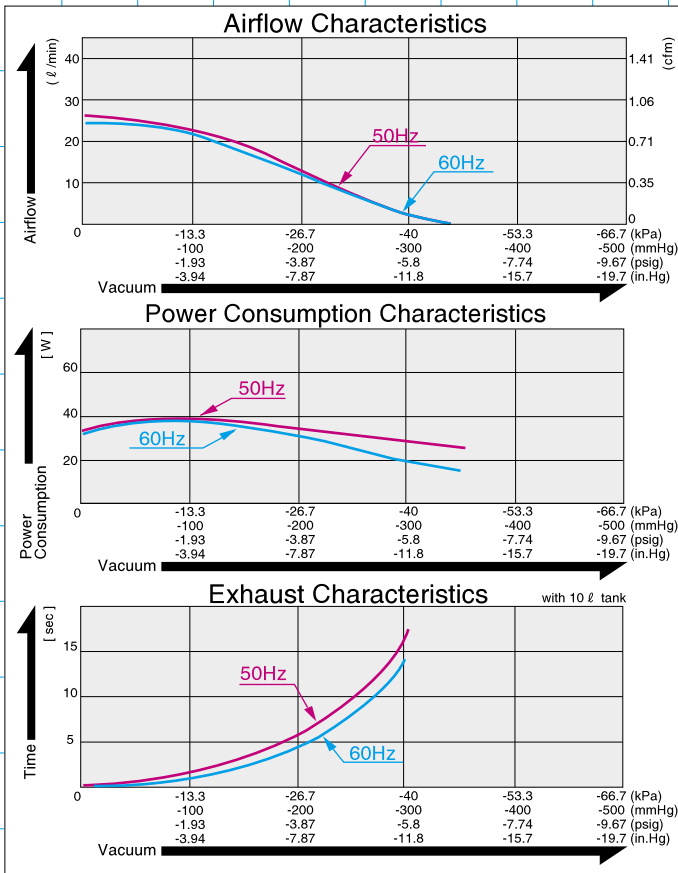


	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum	-46.7 kPa (-350 mmHg)	-467 mbar	-13.78 in.Hg
Free Air Displacement	25 l/min		0.88 cfm
Rated Voltage	115 V AC or 230 V AC		
Power Consumption	39 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	3,000 hours		
Inlet	ISO Rc 1/4 (female threaded)		
Outlet	ISO Rc 1/4 (female threaded)		
Duty Cycle	Continuous		
Coil Insulation Class	B or its equivalent (JETL) / UL		
Mounting Dimensions	68 (L) x 84 (W) mm	2-11/16" (L) x 3-5/16" (W)	
Gross Weight	2.3 kg	5.1 Lbs.	
Leadwire Length	200 mm	7-7/8"	

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

Application Examples



Machine Screw Feeder



Medical Cup Suction

Sketch Drawing and Mounting Dimensions Diagram (mm)

