

# DIAPHRAGM PUMP


## DIAPHRAGM PUMP



# vc0201 Blower Type

### Airflow & Power Consumption


### Specifications

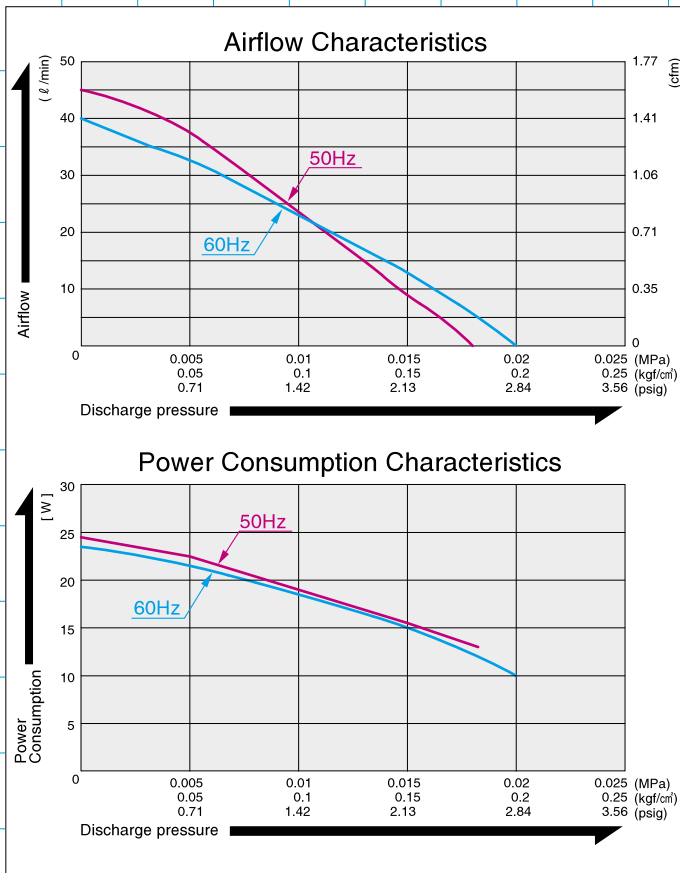

	(SI)	(EURO)	(U.S.A.)
Rated Pressure	0.01 MPa (0.1 kgf/cm <sup>2</sup> )	0.1 bar	1.42 psig
Rated Airflow	20 l/min		
Rated Voltage	120 V AC or 230 V AC		
Maximum Pressure	0.018 MPa (0.18 kgf/cm <sup>2</sup> )	0.18 bar	2.56 psig
Power Consumption	18 W or 19 W		
Rated Frequency	60 Hz or 50 Hz		
Working Pressure Range	0~0.018 MPa (0~0.18 kgf/cm <sup>2</sup> )	0 ~ 0.18 bar	0 ~ 2.56 psig
Life Expectancy	10,000 hours		
Outlet (or Inlet)	8.5 mm O.D. hose nipple		
Duty Cycle	Continuous		
Coil Insulation Class	A for 120V & B for 230V or its equivalent		
Mounting Dimensions	100 (L) x 85 (W) mm	3-15/16" (L) x 3-3/8" (W)	
Gross Weight	1.8 kg	4 Lbs.	
Leadwire Length	200 mm	7-7/8"	

Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

### Application Examples

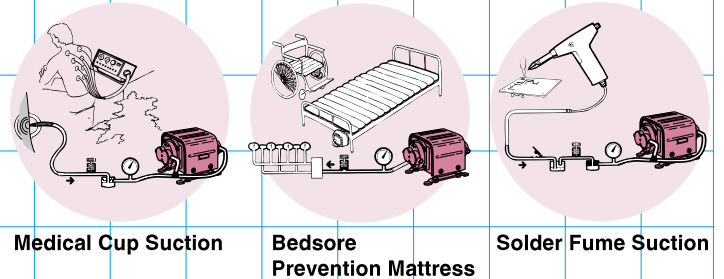

### Sketch Drawing and Mounting Dimensions Diagram (mm)

