

Made-to-order VACUUM PUMP

LINEAR

VP0645




**MOTOR FREE
PISTON SYSTEM**



Airflow & Power Consumption


Specifications

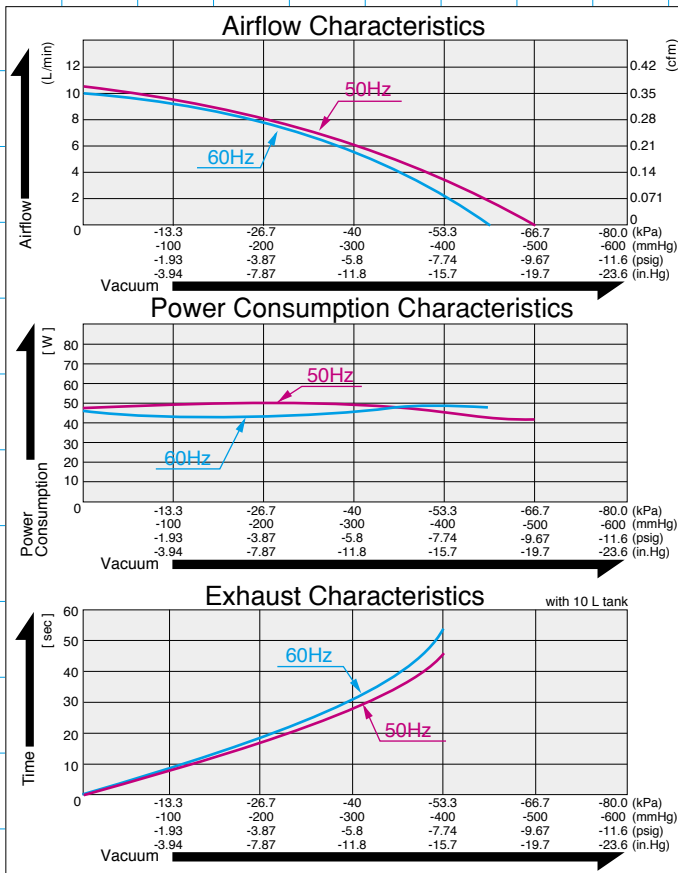

	(SI)	(EURO)	(U.S.A.)
Attainable Vacuum ^{※1}	-60 kPa (-450 mmHg)	-600 mbar	-17.7 in.Hg
Free Air Displacement	10 L/min		0.35 cfm
Rated Voltage	115 V AC or 230 V AC		
Power Consumption	48 W or 50 W		
Rated Frequency	60 Hz or 50 Hz		
Life Expectancy	3,000 hours		
Inlet	15 mm O.D. hose nipple		
Outlet	ISO Rc 1/4		
Duty Cycle	Continuous		
Coil Insulation Class	E or its equivalent (JETL)		
Mounting Dimensions	68 (L) x 84 (W) mm	2 ^{-11/16} "(L) x 3 ^{-5/16} "(W)	
Gross Weight	3.2 kg	7.1 Lbs.	
Leadwire Length	200 mm	7-7/8"	

※1: Operations at higher than -60kPa need an additional leak valve or relief valve on the inlet piping. Please read the page of "How to Use This Catalog" first for correct use of compressors and pumps.

Application Examples

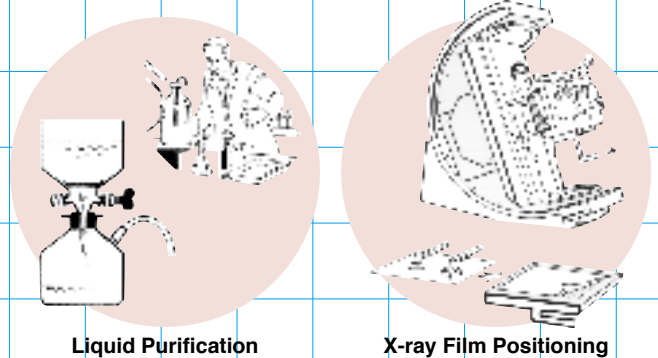

Sketch Drawing and Mounting Dimensions Diagram (mm)

