

Specification

Model	MVAA-300-3A1,A2	MVAA-300-4A1,A2	
Bore No.	10A		
Port size	Rc3/8		
No. of port	3	5	
Medium	Air		
Operating pressure range	0.15~0.8 MPa		
Proof pressure	1 MPa		
Effective orifice	35 mm ²		
Pilot pressure range	(0.34 × P [*] + 0.1)~0.8 MPa		
Ambient temperature	-5~+60°C (No freezing)		
Weight	295 g	324 g	236 g 301 g

※ P: Operating pressure.

Order example

MVAA — 300 — 4A2 — NC — G

MODEL

BODY WIDTH


3: 3way
4: 4way

A1: Single pilot
A2: Double pilot

NC: Normally closed
NO: Normally open
(Only for 3A1 type)

PORT THREAD
Blank: Rc thread
G: G thread
NPT: NPT thread

Flow features




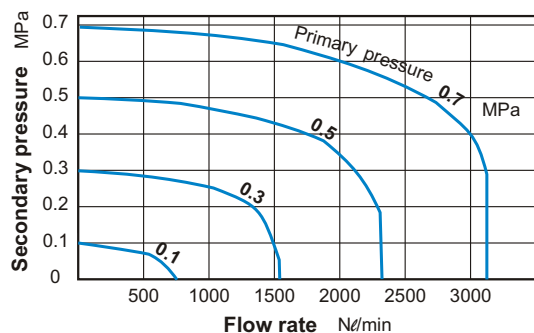


MVAA-300 Dimensions





PILOT VALVE



MVAA-300-4A1

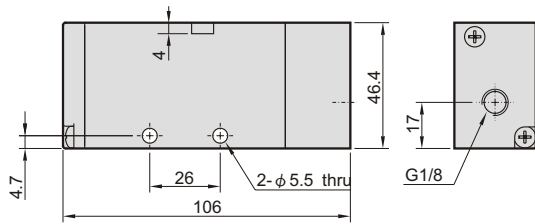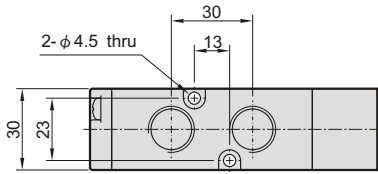


MVAA-300-4A2

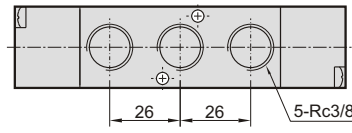
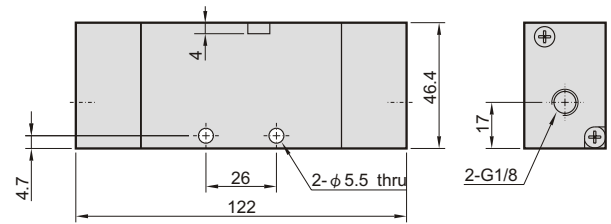
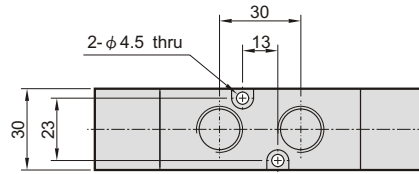



MVAA-300-3A1-NC/NO

NC



NO

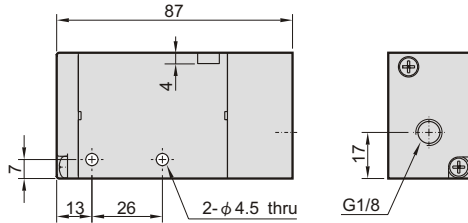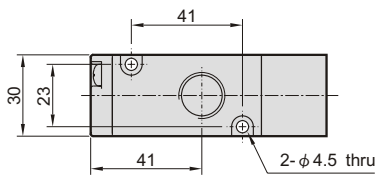

MVAA-300-3A2

