


MVSY-188 series

SOLENOID VALVE



mindman

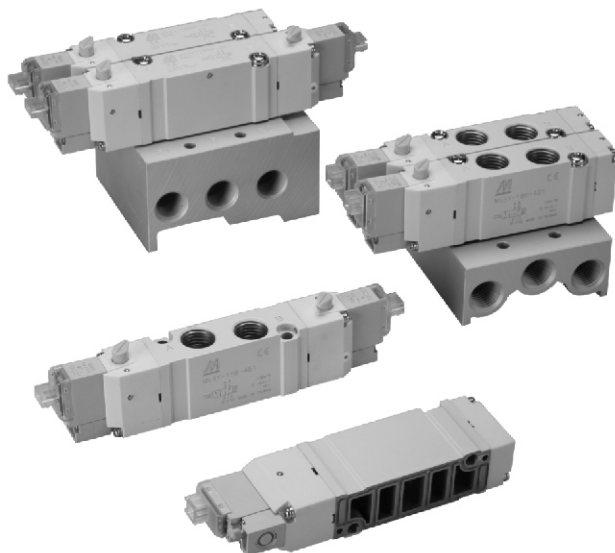


Specification

Model		4E1	4E2	4E2C.P.R
Bore No.		8A		
Port size		Rc1/4		
No. of port		5		
No. of position		2		3
Medium		Air		
Operating pressure range		0.15~0.7 MPa		0.2~0.7 MPa
Proof pressure		1 MPa		
Effective orifice	Body ported	15 mm ²		16.3 / 27 / 12.4 mm ²
	Manifold	13 mm ²		13.5 / 18.4 / 11 mm ²
Response time		23 ms		50 ms
Ambient temperature		+5~+50℃		
Voltage		AC110V, AC220V (50/60)Hz, DC6/12/24V		
Power consumption		AC=1.6 / 2.5VA, DC=1.2W (LED indicator)		
Available voltage range		± 10%		
Insulation class		B class		
Weight		84 g	106 g	116 g


Order example of valve

MVSY – 188M – 4E2C – AC110 – LJ1 – G

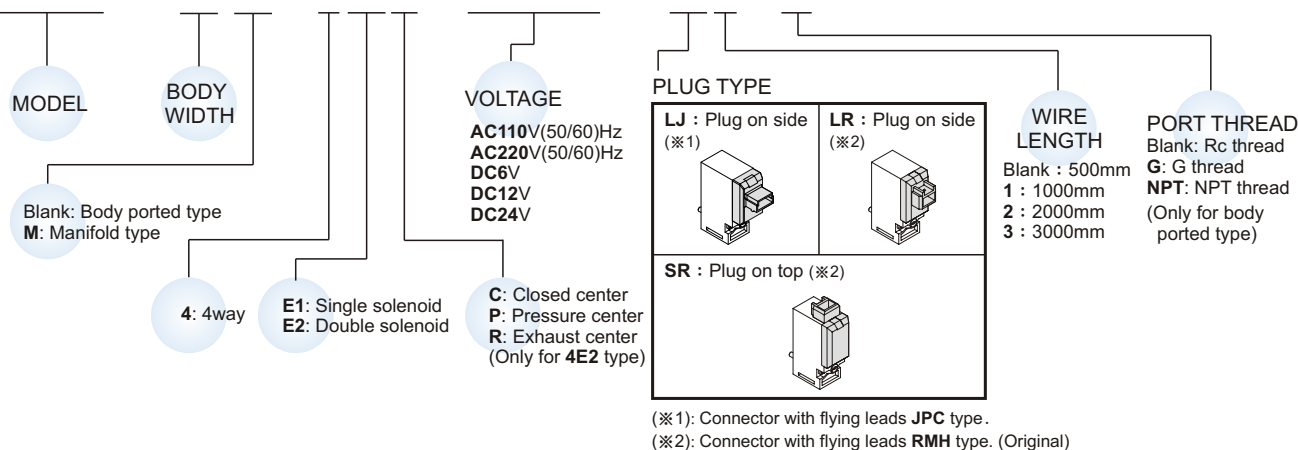


Order example of manifold

MVSY – 188M – 5M3 – G

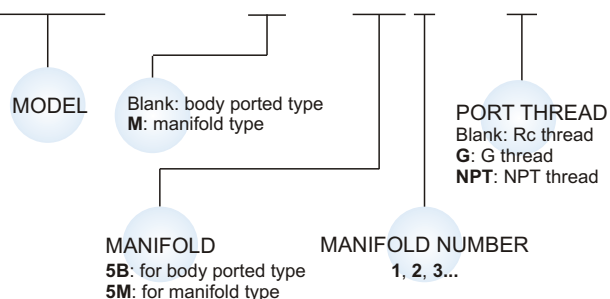

Order example of wire

MVDY – 100 – WA2J2

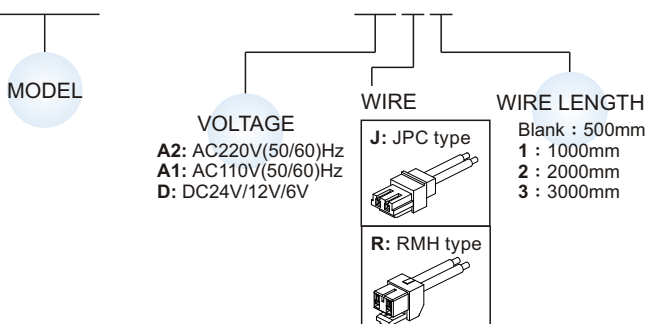



mindman

MVSY-188 Dimensions



SOLENOID VALVE



MVSY-188-4E1

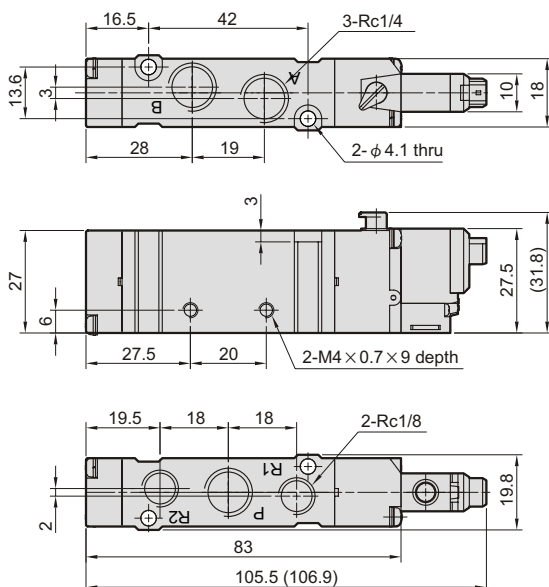


MVSY-188-4E2

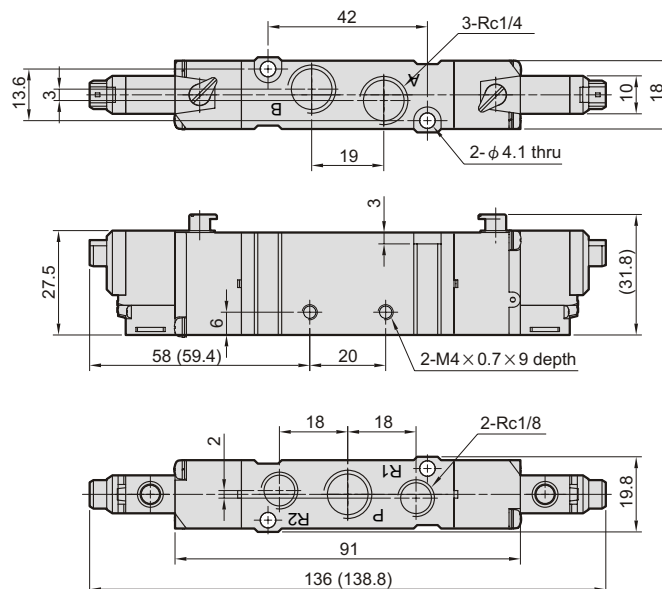


Flow features

MVSY-188-4E1/4E2

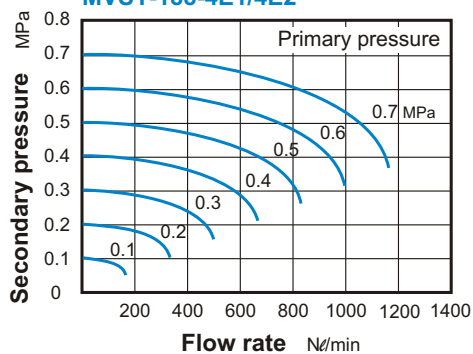

MVSY-188M-4E1/4E2




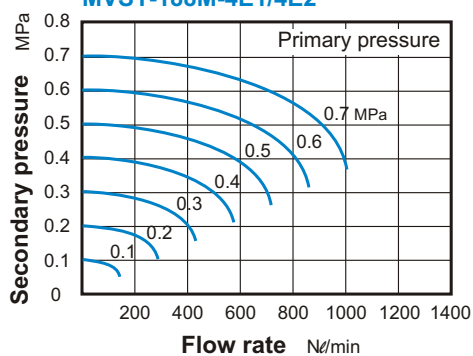


MVSY-188-4E2C.P.R

MVSY-188-4E2C

MVSY-188-4E2P

MVSY-188-4E2R

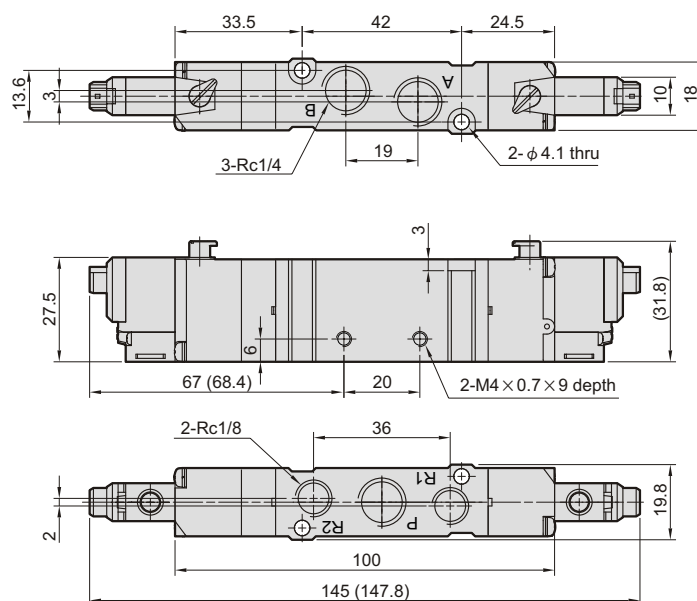

() : Dimension for LJ plug type.



mindman

MVSY-188


Manifold

SOLENOID VALVE



MVSY-188-5B*


for body ported type

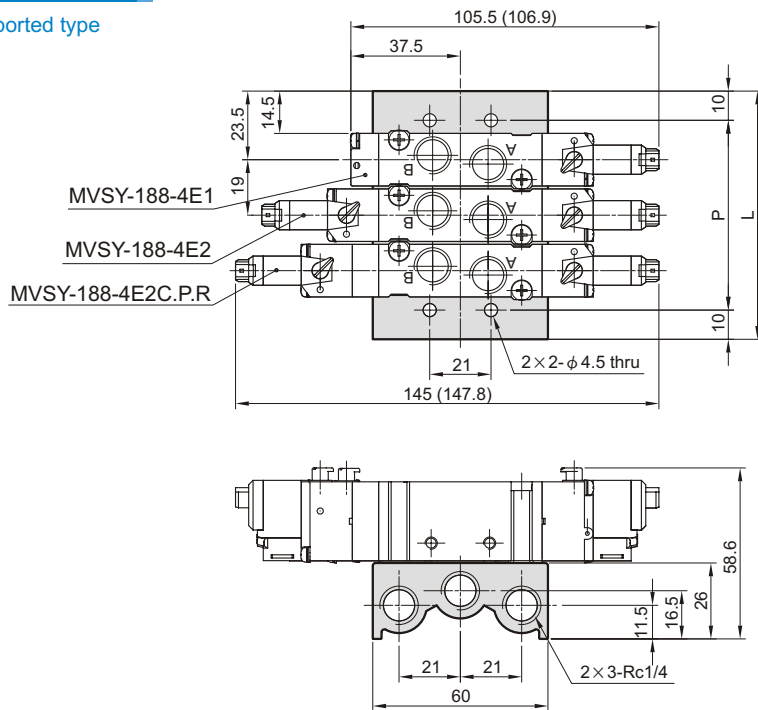

No. of stations	P	L
2	46	66
3	65	85
4	84	104
5	103	123
6	122	142
7	141	161
8	160	180
9	179	199
10	198	218

MVSY-188-5M*

for manifold type

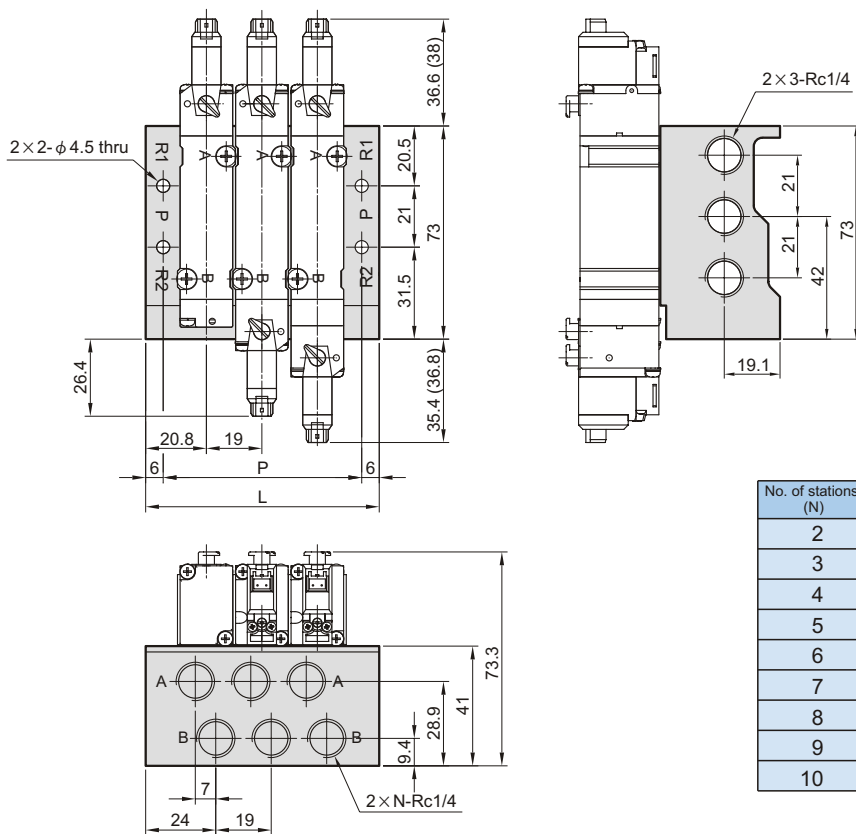

No. of stations (N)	P	L
2	49	61
3	68	80
4	87	99
5	106	118
6	125	137
7	144	156
8	163	175
9	182	194
10	201	213

():Dimension for **LJ** plug type.



Mindman

MVSY-188 Mounting bracket

SOLENOID VALVE



Order example of bracket


MVSY – 188 – 1A

MODEL









MOUNTING BRACKET

1A : 1A
2A : 2A

MVSY-188-1A



MVSY-188-2A

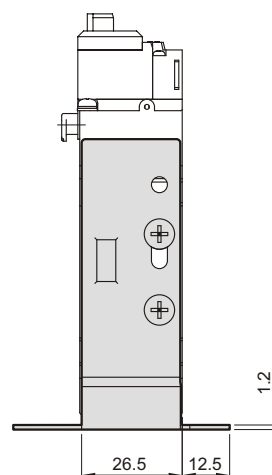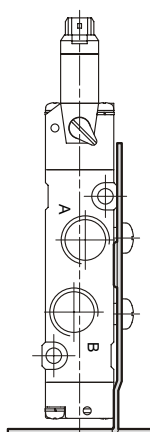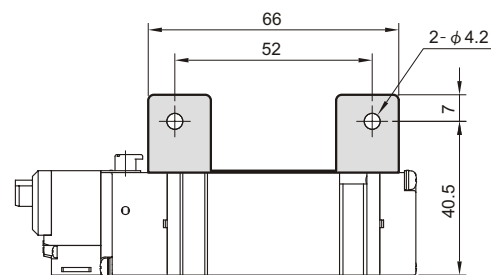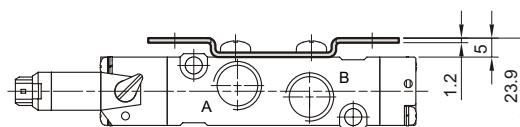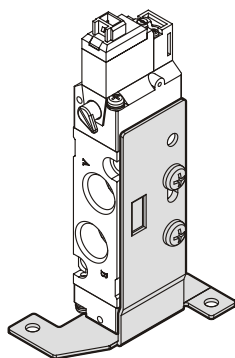

Mindman