


Models and Dimensions


Plug PN type (For urethane hose connection)

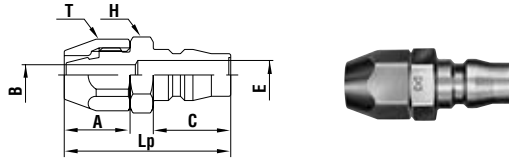

(Old model)

Model	Application (Hose)	Mass (g)	Dimensions (mm)						
			Lp	C	A	øB	øE	H(WAF)	T(WAF)
50PN (10PAH)	ø5 mm x ø8 mm	30	43	20	17	4.5	7.5	Hex.17	Hex.17
60PN (20PAH)	ø6 mm x ø9 mm	40	43	20	17	5.3	7.5	Hex.17	Hex.17
65PN	ø6.5 mm x ø10 mm	42	43	20	17	5.3	7.5	Hex.17	Hex.17
80PN (30PAH)	ø8 mm x ø12 mm	50	45	20	19	7.5	7.5	Hex.19	Hex.19
85PN	ø8.5 mm x ø12.5 mm	52	45	20	19	7.5	7.5	Hex.19	Hex.19
110PN (40PAH)	ø11 mm x ø16 mm	75	52	20	23	7.5	7.5	Hex.23	Hex.24


Plug PNG type (For urethane hose with hose guard nut connection)

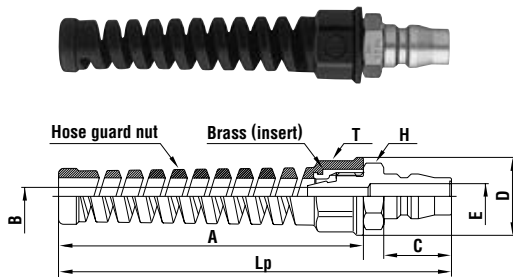

Model	Application (Hose)	Mass (g)	Dimensions (mm)							
			Lp	C	A	øD	øB	øE	H(WAF)	T(WAF)
50PNG*	ø5 mm x ø8 mm	41	116	20	90	23	4.5	7.5	Hex.17	Hex.19
65PNG	ø6.5 mm x ø10 mm	43	116	20	90	23	5.3	7.5	Hex.17	Hex.19
85PNG	ø8.5 mm x ø12.5 mm	55	116	20	90	26	7.5	7.5	Hex.19	Hex.22

* Made-to-order item.


Socket SN type (For urethane hose connection)

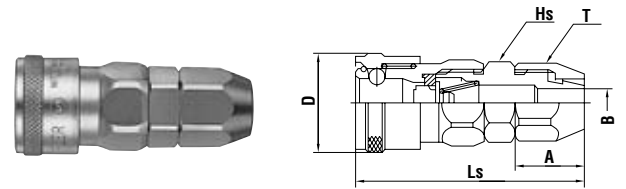

(Old model)


Model	Application (Hose)	Mass (g)	Dimensions (mm)					
			Ls	A	øD	øB	Hs(WAF)	T(WAF)
50SN (10SAH)	ø5 mm x ø8 mm	117	60	17	26.5	4.5	Hex.19	Hex.17
60SN (20SAH)	ø6 mm x ø9 mm	115	59.5	17	26.5	5.3	Hex.19	Hex.17
65SN	ø6.5 mm x ø10 mm	115	59.5	17	26.5	5.3	Hex.19	Hex.17
80SN (30SAH)	ø8 mm x ø12 mm	120	61.5	19	26.5	7.5	Hex.19	Hex.19
85SN	ø8.5 mm x ø12.5 mm	120	61.5	19	26.5	7.5	Hex.19	Hex.19
110SN (40SAH)	ø11 mm x ø16 mm	153	64.5	23	26.5	10	Hex.23	Hex.24

Socket SN type (For urethane hose connection)

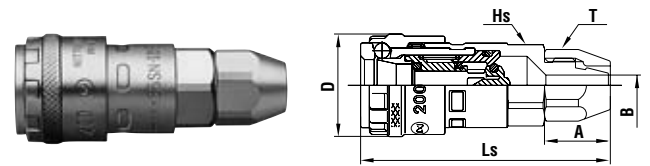

Model	Application (Hose)	Mass (g)	Dimensions (mm)					
			Ls	A	øD	øB	Hs(WAF)	T(WAF)
200-50SN	ø5 mm x ø8 mm	105	64.5	17	26.5	4.5	Hex.19	Hex.17
200-60SN	ø6 mm x ø9 mm	105	64.5	17	26.5	5.3	Hex.19	Hex.17
200-65SN	ø6.5 mm x ø10 mm	106	64.5	17	26.5	5.3	Hex.19	Hex.17
200-80SN	ø8 mm x ø12 mm	112	66.5	19	26.5	7.5	Hex.19	Hex.19
200-85SN	ø8.5 mm x ø12.5 mm	113	66.5	19	26.5	7.5	Hex.19	Hex.19
200-110SN	ø11 mm x ø16 mm	127	62	23	26.5	10	Hex.23	Hex.24

Socket SNG type (For urethane hose with hose guard nut connection)

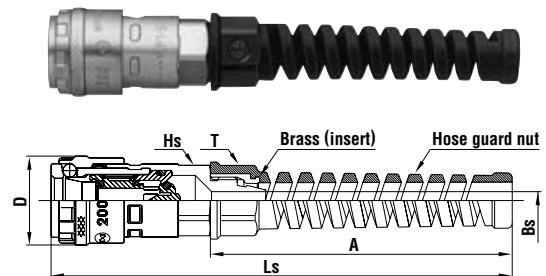

Model	Application (Hose)	Mass (g)	Dimensions (mm)					
			Ls	A	øD	øBs	Hs(WAF)	T(WAF)
200-50SNG*	ø5 mm x ø8 mm	105	137.5	90	26.5	4.5	Hex.19	Hex.19
200-65SNG	ø6.5 mm x ø10 mm	107	137.5	90	26.5	5.3	Hex.19	Hex.19
200-85SNG	ø8.5 mm x ø12.5 mm	116	137.5	90	26.5	7.5	Hex.19	Hex.22