



Models and Dimensions

Plug O2PH type (Hose barb)

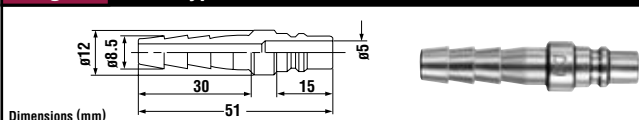


Model	Application (Hose)	Mass (g)
O2PH	1/4"	16

Plug PN type (For connection to urethane hose)




Model	Application (Hose)	Mass (g)	Dimensions (mm)					
			Lp	C	A	H(WAF)	øBp	øB
O1PN	ø5mm x ø8mm	27.6	38.5	15	17	Hex.17	6	3.8
O2PN	ø6.5mm x ø10mm	27.6	38.5	15	17	Hex.17	6	5.3

Plug PM type (Male thread)




Model	Application	Mass (g)	Dimensions (mm)					
			Lp	C	A	H(WAF)	T	øBp
O1PM	Rc 1/8	12	31	15	10	Hex.12	R 1/8	5
O2PM	Rc 1/4	22.7	34	15	13	Hex.17	R 1/4	6

Plug O2PFF type (Parallel female thread)

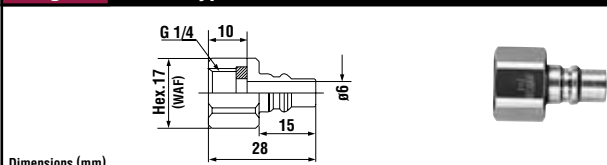


Model	Application	Mass (g)
O2PFF	G 1/4	17.7

Plug/Socket Model O2S20P (Conversion model to connect Hi Cupla socket and Super Cupla plug)

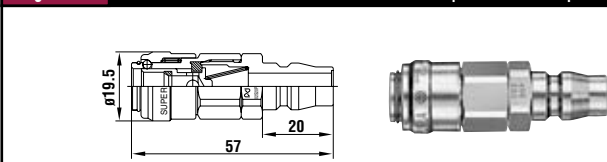


Model	Application	Mass (g)
O2S20P	Hi Cupla (Socket)	58

Plug PC type (Straight type with Tube Fitter)

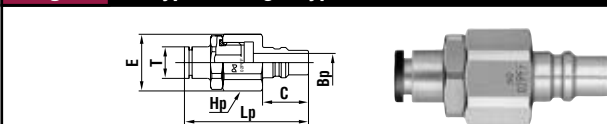


Model	Application (Tube)	Mass (g)	Dimensions (mm)					
			Lp	C	E	Hp(WAF)	øT	øBp
O2PC-6	6mm OD	28.5	(40.5)	15	18.5	Hex.17	10.3	6
O2PC-8	8mm OD	33	(47.5)	15	18.5	Hex.17	13.5	6

Plug PCL type (Straight type with Tube Fitter)

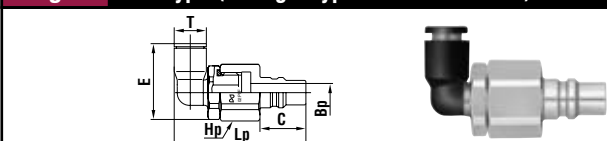


Model	Application (Tube)	Mass (g)	Dimensions (mm)					
			Lp	C	E	Hp(WAF)	øT	øBp
O2PCL-6	6mm OD	29.5	(43)	15	(25.3)	Hex.17	10.3	6
O2PCL-8	8mm OD	34.5	(46.5)	15	(32.3)	Hex.17	13.5	6

Socket O2SH type (Hose barb)

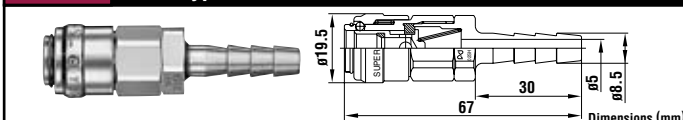


Model	Application (Hose)	Mass (g)
O2SH	1/4"	56

Socket SN type (For connection to urethane hose)

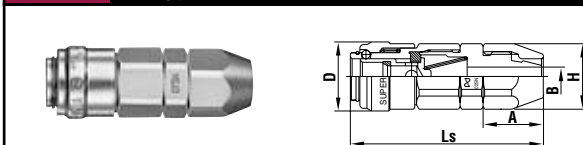


Model	Application (Hose)	Mass (g)	Dimensions (mm)				
			Ls	A	øD	H(WAF)	øB
O1SN	ø5mm x ø8mm	35	54.5	17	19.5	Hex.17	3.8
O2SN	ø6.5mm x ø10mm	35	54.5	17	19.5	Hex.17	5.3

Socket SM type (Male thread)

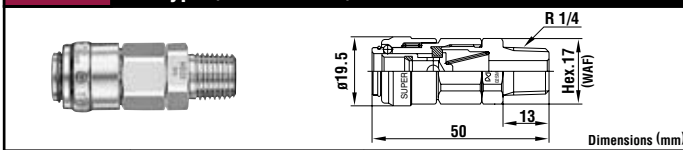


Model	Application	Mass (g)
O2SM	Rc 1/4	57

Socket O2SF type (Female thread)

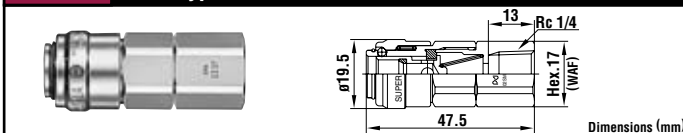


Model	Application	Mass (g)
O2SF	R 1/4	26

Socket O2SMF type (Parallel female thread)

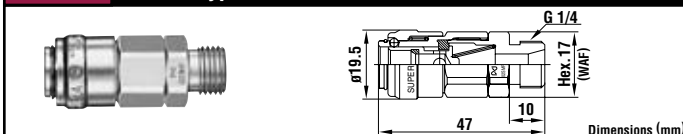


Model	Application	Mass (g)
O2SMF	G 1/4	27

Socket SC type (Straight type with Tube Fitter)




Model	Application (Tube)	Mass (g)	Dimensions (mm)			
			Ls	øD	Hs(WAF)	øT
O2SC-6	6mm OD	46	(65.5)	19.5	Hex.16	10.3
O2SC-8	8mm OD	50.5	(70)	19.5	Hex.16	13.5

Socket SCL type (Straight type with Tube Fitter)

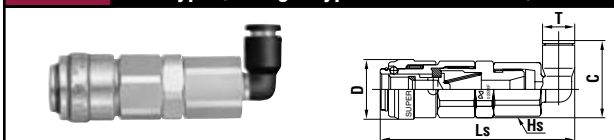

Model	Application (Tube)	Mass (g)	Dimensions (mm)				
			Ls	øD	Hs(WAF)	C	øT
O2SCL-6	6mm OD	47.5	(63.5)	19.5	Hex.16	(25.7)	10.3
O2SCL-8	8mm OD	49.5	(67.7)	19.5	Hex.16	(32.8)	13.5

Socket SCB type (Straight type with Tube Fitter)



Model	Application (Tube)	Mass (g)	Dimensions (mm)				
			Ls	øD	Hs(WAF)	H(WAF)	øT
O2SCB-6	6mm OD	45.5	(71.5)	18	Hex.17	Hex.15	M12x1
O2SCB-8	8mm OD	46.5	(72)	21	Hex.17	Hex.18	M15x1

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.