



Models and Dimensions

Plug PH type (Hose barb)

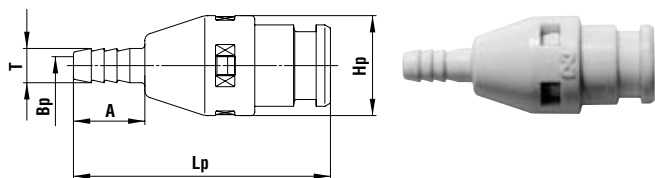


Model	Application (Tube)	Built-in valve	Mass (g)	Dimensions (mm)				
				Lp	A	øHp	øT	øBp
SPC-04PH	4mm ID	○	3.1	36	10	14	4.8	2.5
SPC-04PH-VL	4mm ID	—	2.6	36	10	14	4.8	2.5
SPC-06PH	6mm ID	○	3.4	40	15	14	7	3.6
SPC-06PH-VL	6mm ID	—	2.9	40	15	14	7	3.6

Plug PM type (Male thread)

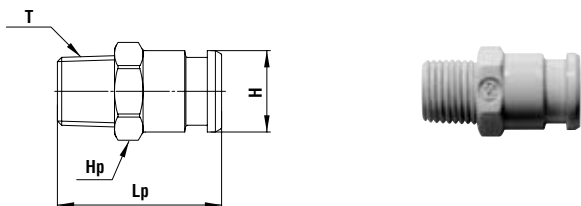


Model	Application	Built-in valve	Mass (g)	Dimensions (mm)			
				Lp	øH	Hp(WAF)	T
SPC-10PM	Rc 1/8	○	2.0	23	11.4	Hex.12	R 1/8
SPC-10PM-VL	Rc 1/8	—	1.5	23	11.4	Hex.12	R 1/8

Plug PHB type (For panel mount)

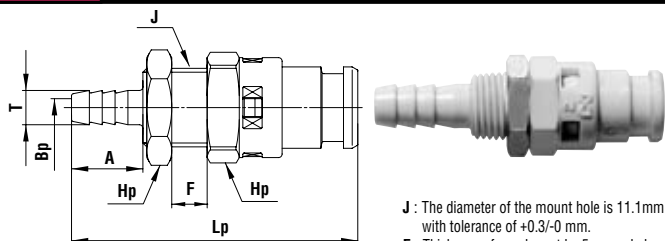


Model	Application	Built-in valve	Mass (g)	Dimensions (mm)				
				Lp	A	Hp(WAF)	øT	øBp
SPC-04PHB	4mm ID	○	5.9	40	10	Hex.14	4.8	2.5
SPC-04PHB-VL	4mm ID	—	5.4	40	10	Hex.14	4.8	2.5
SPC-06PHB	6mm ID	○	6.2	45	15	Hex.14	7	3.6
SPC-06PHB-VL	6mm ID	—	5.7	45	15	Hex.14	7	3.6

Socket SH type (Hose barb)

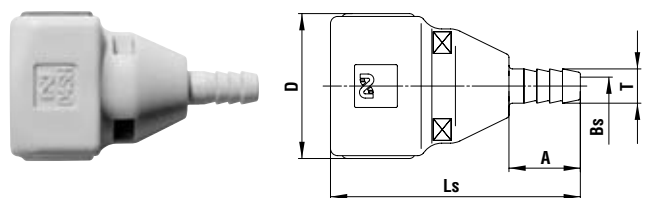

Model	Application (Tube)	Built-in valve	Mass (g)	Dimensions (mm)				
				Ls	A	D	øT	øBs
SPC-04SH	4mm ID	○	6.5	35	10	20.3	4.8	2.5
SPC-04SH-VL	4mm ID	—	6.1	35	10	20.3	4.8	2.5
SPC-06SH	6mm ID	○	7.0	40	15	20.3	7	3.6
SPC-06SH-VL	6mm ID	—	6.6	40	15	20.3	7	3.6

Socket SM type (Male thread)

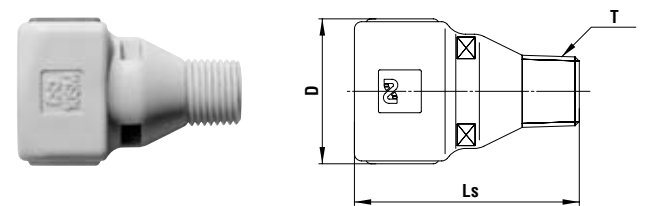

Model	Application	Built-in valve	Mass (g)	Dimensions (mm)		
				Ls	D	T
SPC-10SM	Rc 1/8	○	6.8	31.5	20.3	R 1/8
SPC-10SM-VL	Rc 1/8	—	6.4	31.5	20.3	R 1/8

Application example

