


Model	Pipe OD	Model	Size	Mass (g)	Dimensions (mm)					
					L	A	H(WAF)	øB	øD	E
PCV400*	ø4.0	PCV400-2	R 1/4	155	(59)	12	Hex.17	2.2	22.2	(32.5)
		PCV400-3	R 3/8	155	(60)	13	Hex.19			
PCV470	ø4.76 (3/16")	PCV470-2	R 1/4	155	(60)	12	Hex.17	2.2	22.2	(32.5)
		PCV470-3	R 3/8	160	(61)	13	Hex.19			
		PCV470-0	Blind plug	160	(47)	-	Hex.14	-		
PCV500*	ø5.0	PCV500-2	R 1/4	155	(59)	12	Hex.17	2.2	22.2	(32.5)
		PCV500-3	R 3/8	155	(60)	13	Hex.19			
PCV600	ø6.0	PCV600-2	R 1/4	150	(60)	12	Hex.17	3.4	22.2	(32.5)
		PCV600-3	R 3/8	155	(61)	13	Hex.19			
		PCV600-0	Blind plug	155	(47)	-	Hex.14	-		
PCV630	ø6.35 (1/4")	PCV630-2	R 1/4	145	(60)	12	Hex.17	3.4	22.2	(32.5)
		PCV630-3	R 3/8	150	(61)	13	Hex.19			
		PCV630-0	Blind plug	150	(49)	-	Hex.14	-		
PCV800	ø8.0 (5/16")	PCV800-2	R 1/4	175	(62)	12	Hex.17	4.6	24.8	(35.5)
		PCV800-3	R 3/8	180	(63)	13	Hex.19			
		PCV800-0	Blind plug	185	(50)	-	Hex.17	-		
PCV950	ø9.52 (3/8")	PCV950-2	R 1/4	175	(62)	12	Hex.17	4.6	24.8	(35.5)
		PCV950-3	R 3/8	180	(63)	13	Hex.19			
		PCV950-0	Blind plug	180	(50)	-	Hex.17	-		
PCV1000*	ø10.0	PCV1000-2	R 1/4	155	(62)	12	Hex.17	4.6	24.8	(35.5)
		PCV1000-3	R 3/8	155	(63)	13	Hex.19			
PCV1270	ø12.7 (1/2")	PCV1270-3	R 3/8	465	(81)	13	Hex.24	9.7	34.8	(45.0)
		PCV1270-0	Blind plug	475	(68)	-		-		
PCV1590	ø15.88 (5/8")	PCV1590-3	R 3/8	435	(81)	13	Hex.24	10.0	34.8	(45.0)
		PCV1590-0	Blind plug	445	(68)	-		-		

* For mass with a plug, add (brass body) 2P-V : 39g, 3P-V : 67g, (stainless steel body) 2P-V : 34g, or 3P-V : 59g * Available on request

Clamping mechanism

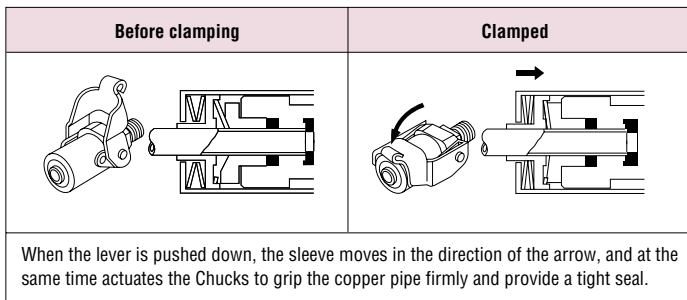

Application example



Compressor pressure test

Before use, please be sure to read "Safety Guide" described at the end of this book and "Instruction Sheet" that comes with the products.