



Models and Dimensions

Plug LE type (Hose barb)

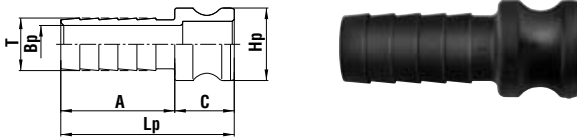

material	Model	Size	Mass (g)	Dimensions (mm)					
				Lp	A	C	øHp	øT	øBp
Plastic	LE-6TPH	3/4"	16	74.5	51.5	23	32	21	14.5
	LE-8TPH	1"	29	87.5	57.5	30	36.5	26.5	19
	LE-12TPH	1 1/2"	73	103	61	42	54	40	30
	LE-16TPH	2"	122	119	71	48	63	53	41
	LE-24TPH	3"	221	152.5	108	44.5	91	80	65

Socket LC type (Hose barb)

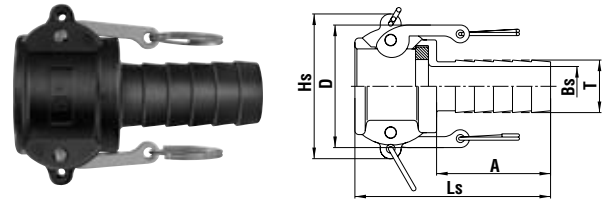


material	Model	Size	Mass (g)	Dimensions (mm)					
				Ls	A	D	Hs	øT	øBs
Plastic	LC-6TSH	3/4"	64	83.5	52	65.5	52	20	14
	LC-8TSH	1"	104	99	57.5	62	73	26.5	20
	LC-12TSH	1 1/2"	242	111	61	91	101	40	30
	LC-16TSH	2"	269	126	71	100	106	51	41
	LC-24TSH	3"	527	161	102	136	138	77.5	65

Plug LA type (Female thread)




material	Model	Size	Mass (g)	Dimensions (mm)					
				Lp	A	C	Hp(WAF)	øBp	T
Plastic	LA-6TPF	3/4"	19	42	16	26	Hex.34	21	Rc 3/4
	LA-8TPF	1"	27	59	25	34	Hex.43	22	Rc 1
	LA-12TPF	1 1/2"	65	67	25	42	Ribbed 65	37	Rc1 1/2
	LA-16TPF	2"	90	72.5	25	48.5	Ribbed 74	44	Rc 2
	LA-24TPF	3"	211	90	33.5	52.5	Ribbed 108	72	Rc 3

Socket LD type (Female thread)

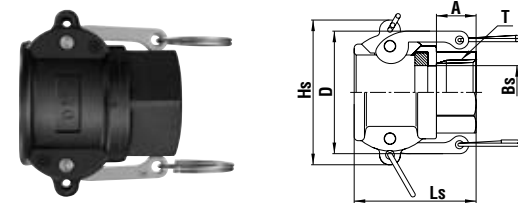


material	Model	Size	Mass (g)	Dimensions (mm)					
				Ls	A	D	Hs(WAF)	øBs	T
Plastic	LD-6TSF	3/4"	65	50	19	58	Hex.32	20	Rc 3/4
	LD-8TSF	1"	98	61.5	20	62	Hex.41	27	Rc 1
	LD-12TSF	1 1/2"	260	78	29.5	92	Ribbed 68	39	Rc1 1/2
	LD-16TSF	2"	285	84	29.5	101	Ribbed 80	50	Rc 2
	LD-24TSF	3"	444	88.5	33	138	Ribbed 109	75	Rc 3

Plug LF type (Male thread)

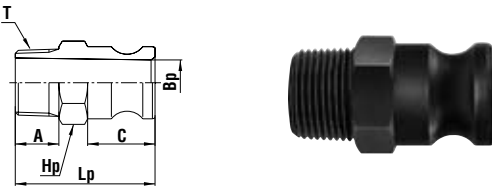


material	Model	Size	Mass (g)	Dimensions (mm)					
				Lp	A	C	Hp(WAF)	øBp	T
Plastic	LF-6TPM	3/4"	23	60	20	26	Hex.32	19	R 3/4
	LF-8TPM	1"	19	70.5	22	34	Hex.37	23	R 1
	LF-12TPM	1 1/2"	72	77	22	42	Ribbed 63	32	R1 1/2
	LF-16TPM	2"	105	84.5	24.5	48	Ribbed 74	45	R 2
	LF-24TPM	3"	210	102	32	51	Ribbed 100	72	R 3

Socket LB type (Male thread)

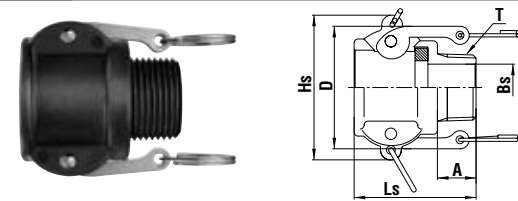

material	Model	Size	Mass (g)	Dimensions (mm)					
				Ls	A	D	Hs	øBs	T
Plastic	LB-6TSM	3/4"	58	51	19	65.5	52	19	R 3/4
	LB-8TSM	1"	88	61.5	19.5	62	61	23.5	R 1
	LB-12TSM	1 1/2"	227	75	25	91	101	37.5	R1 1/2
	LB-16TSM	2"	251	84	28.5	101	108	48.5	R 2
	LB-24TSM	3"	397	91	31.5	136	122	75	R 3

Plug L-PD type (Plug cap)

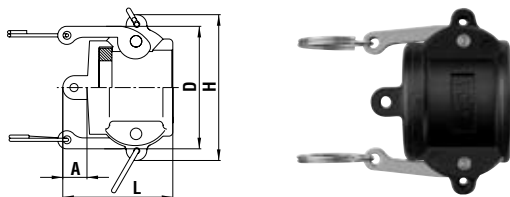

material	Model	Size	Mass (g)	Dimensions (mm)			
				L	A	D	H
Plastic	L-6PD	3/4"	60	45	12	65.5	52
	L-8PD	1"	94	55.5	12	62	73.5
	L-12PD	1 1/2"	214	65	15	91	101
	L-16PD	2"	219	69	14	100	106
	L-24PD	3"	408	77	17.5	136	138

Socket L-SD type (Socket cap)



material	Model	Size	Mass (g)	Dimensions (mm)		
				L	A	øD
Plastic	L-6SD	3/4"	10	35.5	11	32
	L-8SD	1"	18	42	11	36.5
	L-12SD	1 1/2"	46	53.5	14	53
	L-16SD	2"	68	62	14	63
	L-24SD	3"	102	65	18	91

Stopper installation (for plastic only)

Equipped with lever stopper pin tabs to prevent unintended disconnection (for selected models only).

