


Models and Dimensions


Plug Female thread

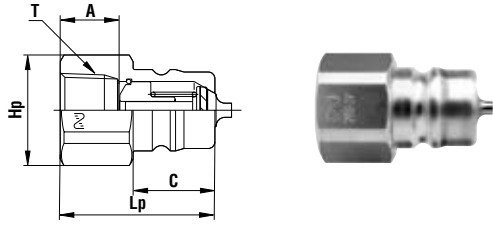

Model	Application	Mass (g)	Dimensions (mm)				
			Lp	C	Hp(WAF)	A	T
280-2P	R 1/4	35	31.5	15	Hex.19	13	Rc 1/4
280-3P	R 3/8	59	35	18.5	Hex.23	13	Rc 3/8
280-4P	R 1/2	115	44	24.5	Hex.29	17	Rc 1/2
280-6P	R 3/4	178	52.5	28	Hex.32	19	Rc 3/4
280-8P	R 1	331	63.5	35	Two flats 41 x ø44	22	Rc 1


* Internal structural design of 280-6S and 280-8S is partly different from the above drawing.

Socket Female thread

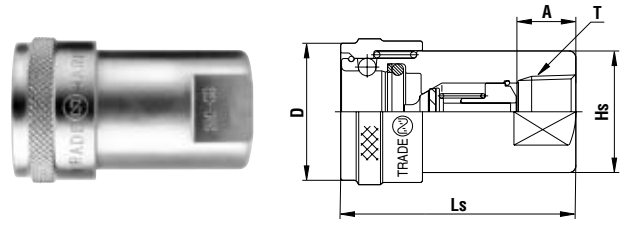


Model	Application	Mass (g)	Dimensions (mm)				
			Ls	øD	Hs(WAF)	A	T
280-2S	R 1/4	110	46	27	Two flats 19 x ø21.7	13	Rc 1/4
280-3S	R 3/8	185	53	33	Two flats 23 x ø27.5	13	Rc 3/8
280-4S	R 1/2	335	66.5	39	Two flats 29 x ø34	17	Rc 1/2
280-6S	R 3/4	571	81	48	Two flats 35 x ø41.3	19	Rc 3/4
280-8S	R 1	871	98	55	Two flats 41 x ø47.8	22	Rc 1

Application example

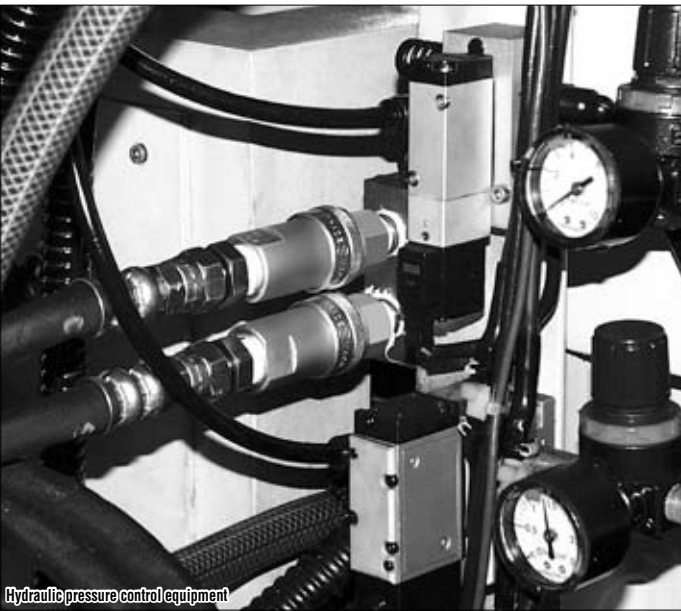

Hydraulic pressure control equipment

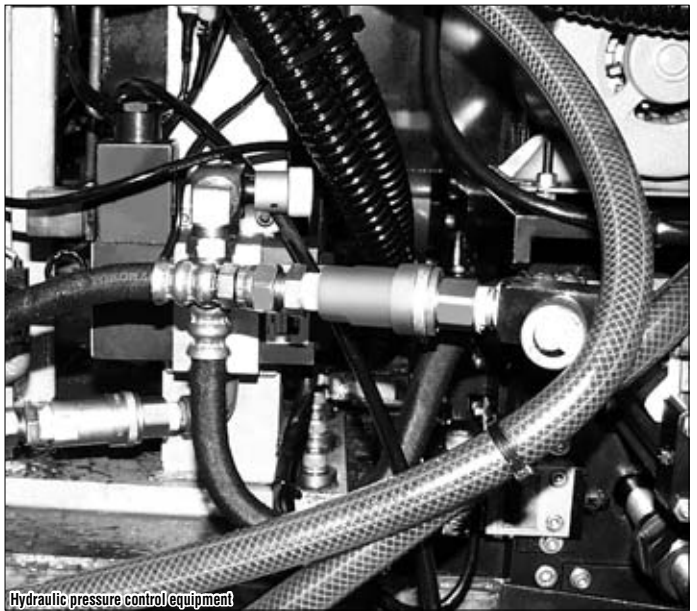

Hydraulic pressure control equipment