


Models and Dimensions


**Plug** Female thread

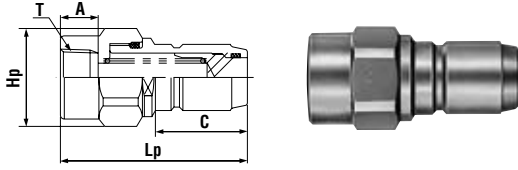

Model	Application	Mass (g)	Dimensions (mm)				
			Lp	C	Hp(WAF)	A	T
350-2P	R 1/4	170	72	36	Hex.27	13	Rc 1/4
350-3P	R 3/8	167	72	36	Hex.27	13	Rc 3/8
350-4P	R 1/2	245	85	40.5	Hex.27	16	Rc 1/2
350-6P	R 3/4	415	90	44.5	Hex.41	18	Rc 3/4
350-8P	R 1	1,035	119	57	Hex.50	22	Rc 1
350-10P	R1 1/4	2,700	144	75	Hex.70	25	Rc1 1/4
350-12P	R1 1/2	2,600	144	75	Hex.70	25	Rc1 1/2
350-16P*	R 2	7,500	198	88.5	Two flats 90 x ø105	29	Rc 2

\* Available on request

**Socket** Female thread

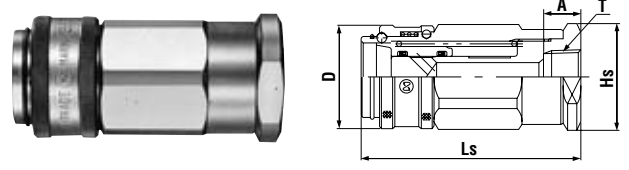

Model	Application	Mass (g)	Dimensions (mm)				
			Ls	øD	Hs(WAF)	A	T
350-2S	R 1/4	360	82	34	Hex.30	13	Rc 1/4
350-3S	R 3/8	353	82	34	Hex.30	13	Rc 3/8
350-4S	R 1/2	465	93.5	41	Hex.36	16	Rc 1/2
350-6S	R 3/4	660	105.5	49	Two flats 46 x ø52	18	Rc 3/4
350-8S	R 1	1,740	129	63	Two flats 55 x ø62	22	Rc 1
350-10S	R1 1/4	5,600	180	89	Hex.80	24	Rc1 1/4
350-12S	R1 1/2	5,500	180	89	Hex.80	25	Rc1 1/2
350-16S*	R 2	14,500	239	117	Two flats 105 x ø115	29	Rc 2

\* Available on request

Application example



Hydraulic unit