


For Low Pressure (Air)

# Line Cupla

200T Type, 200L Type, 200S Type

Simple design air line coupling on manifold

Working pressure



Valve structure




Applicable fluid




## Enables several air lines to be taken simultaneously from one supply line!


- Just push in the plug into socket for simple and secure connection.
- Multiple outlets are available from single air supply source.
- Choose from the 2-outlet type (Model 200T), the 5-outlet straight type (Model 200L) and the 5-outlet star type (Model 200S) to suit your application.



200T type

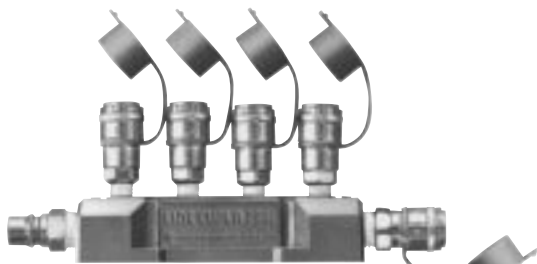

200L type  
(comes with an accessory 400SH and dust caps)

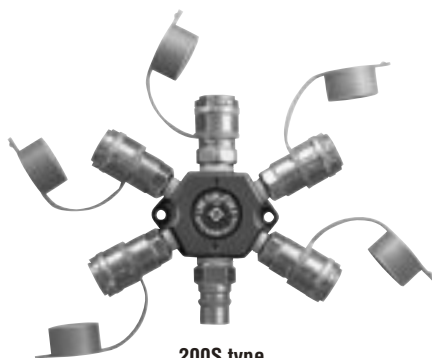


200S type  
(comes with an accessory 400SH and dust caps)

Specifications				
Body material	Body : Aluminum, Cupla : Steel (Chrome-plated)			
Size	Inlet	200T Type : 20PM	200L Type / 200S Type : 400PM	
	Outlet	200T Type : 200-20SM	200L Type / 200S Type : 200-20SM, 40SM	
Working pressure	MPa	1.5		
	kgf/cm <sup>2</sup>	15		
	bar	15		
	PSI	218		
Seal material	Nitrile rubber	Mark	NBR (SG)	Working temperature range -20°C to +60°C
Working temperature range	Standard material			

• The products come with dustproof caps.

### Flow Direction

Fluid must run from the inlet port to the outlet ports.

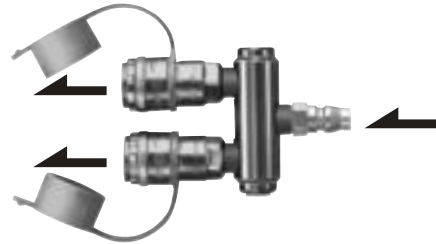

### Interchangeability

Can be connected with plugs for Hi Cupla Models 10, 17, 20, 30 and 40. Interchangeable with each corresponding Hi Cupla Series models.

### Min. Cross-Sectional Area

(mm<sup>2</sup>)

Model	200T type, 200L type, 200S type
Min. cross-sectional area	19

### Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

### Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

