



Plug Female thread



Model	Application	Mass (g)	Dimensions (mm)				
			L	øD	C	H(WAF)	T
280-2P	R 1/4	35	31.5	20.5	15	Hex.19	Rc 1/4
280-3P	R 3/8	59	35	25	18.5	Hex.23	Rc 3/8
280-4P	R 1/2	115	44	32	24.5	Hex.29	Rc 1/2
280-6P	R 3/4	178	52.5	35	28	Hex.32	Rc 3/4
280-8P	R 1	331	63.5	44	35	41	Rc 1


* Internal structural design of 280-6S and 280-8S is partly different from the above drawing.

Socket Female thread




Model	Application	Mass (g)	Dimensions (mm)			
			L	øD	H(WAF)	T
280-2S	R 1/4	110	46	(27)	19	Rc 1/4
280-3S	R 3/8	185	53	(33)	23	Rc 3/8
280-4S	R 1/2	335	66.5	(39)	29	Rc 1/2
280-6S	R 3/4	571	81	(48)	35	Rc 3/4
280-8S	R 1	871	98	(55)	41	Rc 1

Application Example

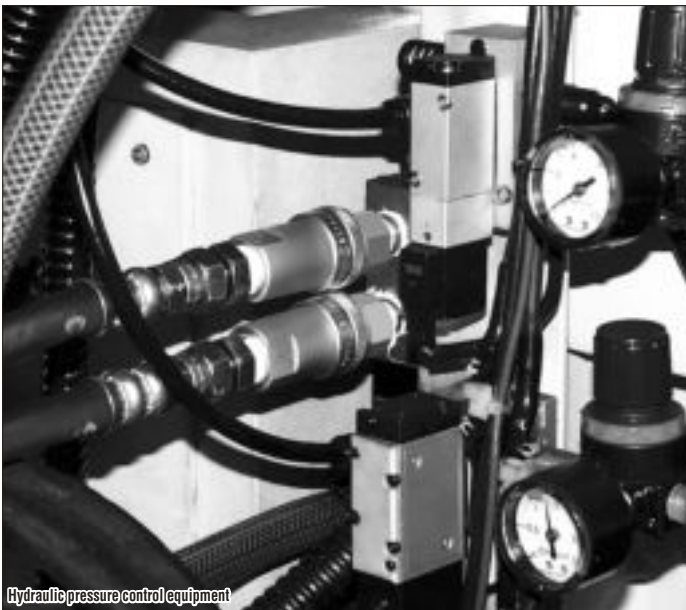

Hydraulic pressure control equipment

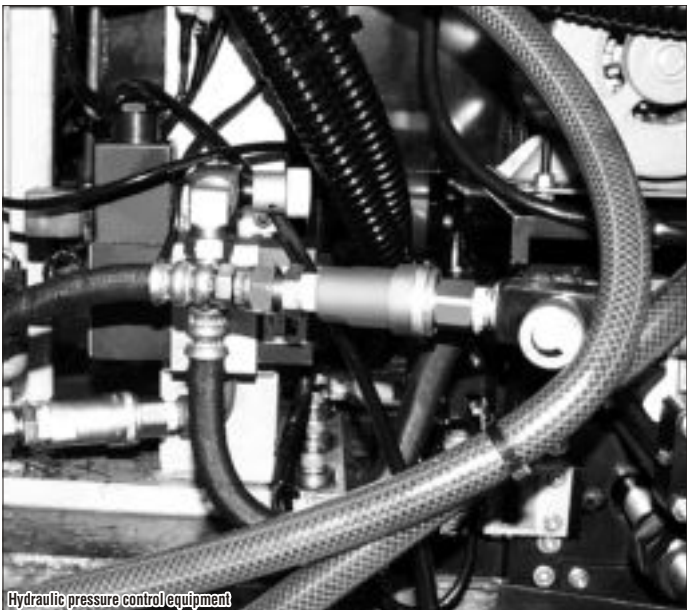

Hydraulic pressure control equipment