



Dimensions of End Configurations

MALC-1 to 8HSP type (Thread screw mount)

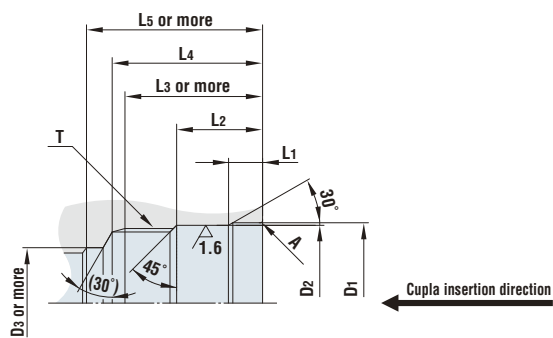

Model	Dimensions (mm)									
	øD ₁	øD ₂	øD ₃	L ₁	L ₂	L ₃	L ₄	L ₅	T	A
MALC-1HS MALC-1HP	17.8 ^{+0.1} ₀	16.8 ^{+0.06} ₀	13	3.5 ^{+0.2} ₀	11	20	22	25	M16 x 1	C0.2
MALC-2HS MALC-2HP	23 ^{+0.1} ₀	22 ^{+0.06} ₀	16	2.8 ^{+0.2} ₀	11	22	25	28	M20 x 1.5	R0.5
MALC-3HS MALC-3HP	27.1 ^{+0.1} ₀	26 ^{+0.08} ₀	18	2.8 ^{+0.2} ₀	11	22	25	29	M24 x 1.5	R0.5
MALC-4HS MALC-4HP	37.7 ^{+0.3} ₀	36.5 ^{+0.08} ₀	26	6 ^{±0.2}	18	30	33	40.5	M35 x 1.5	R0.5
MALC-6HS MALC-6HP	42.5 ^{+0.3} ₀	41.5 ^{+0.08} ₀	30	6 ^{±0.2}	23	40	44	51.5	M40 x 2	R0.5
MALC-8HS MALC-8HP	47.5 ^{+0.3} ₀	46.5 ^{+0.08} ₀	35	10.5 ^{±0.2}	27	43	47	55	M45 x 2	R0.5

MALC-2 to 8HSP-FL type (With flange)

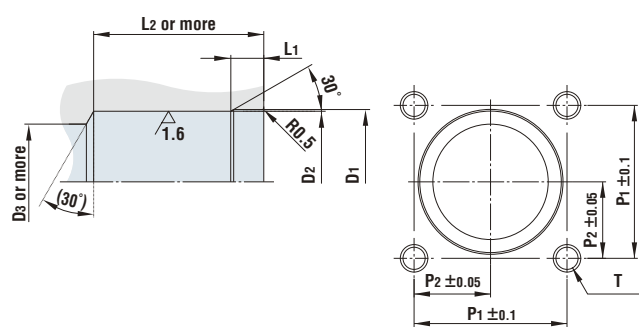

Model	Dimensions (mm)							
	øD ₁	øD ₂	øD ₃	L ₁	L ₂	P ₁	P ₂	T
MALC-2HS-FL MALC-2HP-FL	23 ^{+0.1} ₀	22 ^{+0.06} ₀	16	2.8 ^{+0.2} ₀	28 19	28	14	4 x M6 Thread depth 17 mm or more
MALC-3HS-FL MALC-3HP-FL	27.1 ^{+0.1} ₀	26 ^{+0.08} ₀	18	2.8 ^{+0.2} ₀	28 22	31	15.5	
MALC-4HS-FL MALC-4HP-FL	37.7 ^{+0.3} ₀	36.5 ^{+0.08} ₀	26	6 ^{±0.2}	39 30.5	40	20	
MALC-6HS-FL MALC-6HP-FL	42.5 ^{+0.3} ₀	41.5 ^{+0.08} ₀	30	6 ^{±0.2}	50 40	45	22.5	
MALC-8HS-FL MALC-8HP-FL	47.5 ^{+0.3} ₀	46.5 ^{+0.08} ₀	35	10.5 ^{±0.2}	53 43	55	27.5	4 x M10 Thread depth 15 mm or more