


**Compact, light weight, low profile design gives you greater hole making mobility**

Specifications			
Model		LO-3550	
Power Source (Single Phase)		220 - 240 V AC 50 / 60 Hz	
Electric Drill	Rated Power Consumption	800 W	
	Rated Current	3.3 A	
	No Load Speed	950 min <sup>-1</sup>	
	Magnet Power Consumption	35 W	
Hole-cutting Capacity	Cutter One-touch Type JETBROACH	Hole Diameter	Plate Thickness
		12 to 35 mm	6 to 50 mm
Magnet Holding Power		5,500 N (561 kgf)	
Magnet Dimensions		65 mm (W) × 145 mm (L)	
Cutter Position Adjustment	Pivot Side to Side	10 mm	
	Straight Front to Back	10 mm	
Mass (Weight)		8.7 kg (Without an electric cord and a sub handle)	

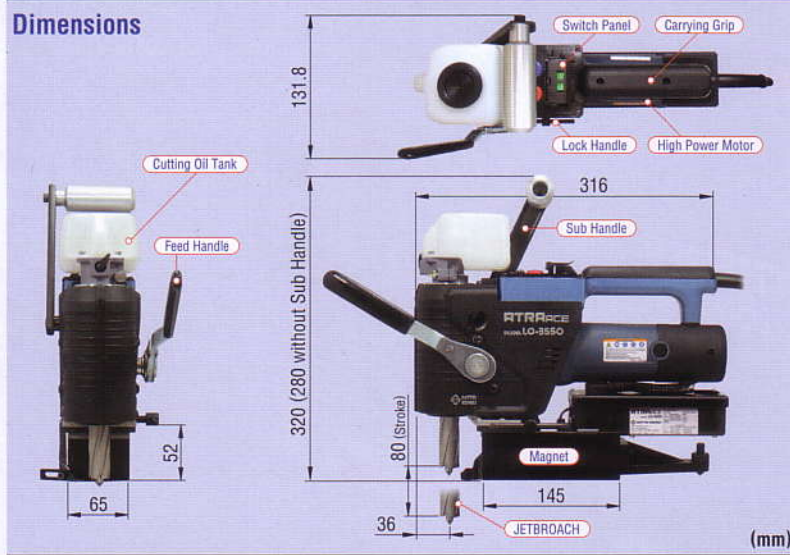

*Chip Breaker breaks cutting chips formed in drilling into small pieces and facilitates chip discharging.*

**Load Detector and Restart Function**

When overload occurs during drilling operation, the drill motor automatically stops to prevent possible damage to the drill motor and cutter. The drill motor will automatically restart if the load is released within 0.5 seconds after overload.

**Easy drilling position adjustment**

After engaging the magnet, the drill position can be adjusted up to 10 mm travel on each axis straight front to back and pivot side to side.



**Adjustable feed handle**

The feed handle can be locked at varying angles to enhance productivity.




**Light handle operation**

Fast revolution of Jetbroach cutter makes less cutting resistance and smooth handling.



**Easy-to-use switch panel**

On / off buttons of the magnet and the drill motor are on the front panel and can be operated by one hand. Drilling conditions can be checked by lamp colors.



**Reversible feed handles**

Feed handles can be positioned on the right or left hand side for ease of drilling and mounting in confined spaces.



★ Specifications and designs are subject to change at any time without notice.



**Head Office**  
 9-4, Nakaikagami 2-chome,  
 Ohta-ku, Tokyo 146-8555 Japan  
 Phone : +81-3-3755-1111 Fax : +81-3-3753-8791

- ▶ E-mail : [overseas@nitto-kohki.co.jp](mailto:overseas@nitto-kohki.co.jp)
- ▶ URL : [www.nitto-kohki.co.jp/e](http://www.nitto-kohki.co.jp/e)

**DISTRIBUTED BY**