


Model

AL-55 High Speed Rotation 56,500 rpm



- Smooth high speed rotation and low vibration enables precision grinding.
- Stepless speed change from 0 to 56,500 rpm meets a wide range of grinding applications.
- Compact & light weight for comfortable operation over long periods of time.
- Triangular grip fits operator's hand.
- Special plastic grip prevents cold hands and absorbs vibration.
- Rear exhaust system.

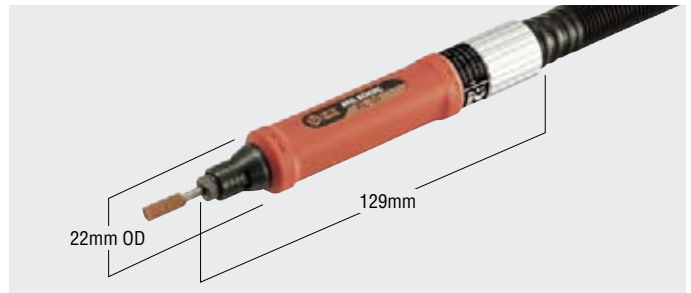

Specifications

Model	AL-55
Rated Air Pressure	MPa {kgf/cm ² } 0.59 {6}
Air Consumption (No load)	m ³ /min 0.17
Free Speed	min ⁻¹ (rpm) 56,500
Size of Collet Chuck	mm 3
Hose Size	inch 1/4
Mass (Weight)	kg 0.25


Standard Accessories	<ul style="list-style-type: none"> • HI-CUPLA HA-65SN : 1 pc. • Mounted Wheel 5 x 13 x 3 : 1 pc. • Spanner 7 : 1 pc. • Spanner 7 x 9 : 1 pc.
-----------------------------	--

AIR DRILL

The power and performance you need to drill deeper and faster

Model

ADR-65

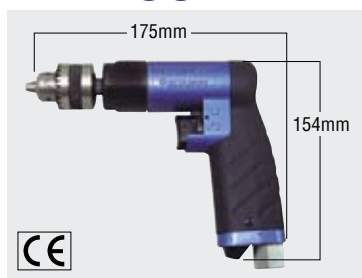

Model


ADR-100



- Built-in silencer
- Reversible
- Variable speed adjustment
- Rubber grip reduces chilled hand

Reversible

Change rotation direction by turning the valve as indicated.

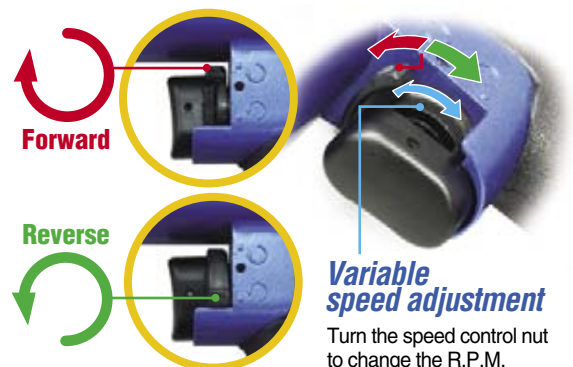

Specifications

Model	ADR-65	ADR-100
Rated Air Pressure	MPa {kgf/cm ² } 0.59 {6}	0.59 {6}
Air Consumption (No load)	m ³ /min 0.55	0.67
Free Speed	min ⁻¹ (rpm) 2,900	2,000
Max. Drilling Capacity	mm 6.5 OD	10.0 OD
Mass (Weight)	kg 0.8	1.1

Standard Accessories	<ul style="list-style-type: none"> • Drill Chuck : 1 pc. on the body • Chuck Handle : 1 pc. • Bushing PT1/4 x NPT1/4 : 1 pc. • 30SH : 1 pc.
Optional Accessory	<ul style="list-style-type: none"> • Hanger : 1pc. *A hanger to be mounted on the bottom of the grip is available as option.