


MICRO AIR HAND

Fine reciprocating motion best for precision parts filing

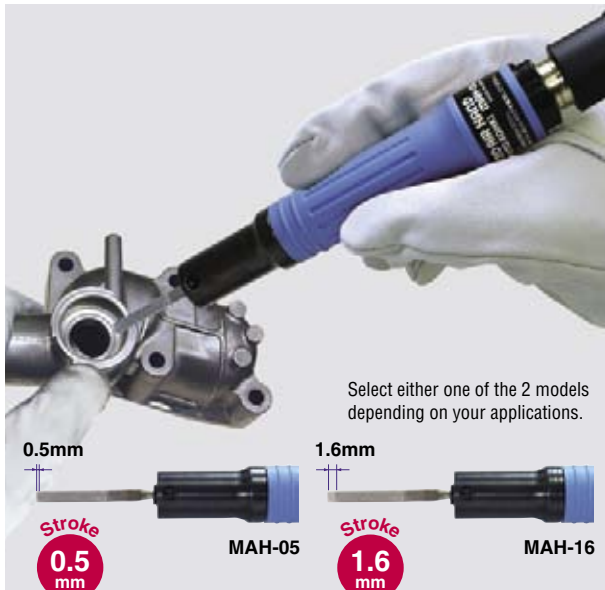

Select either one of the 2 models depending on your applications.


Model **MAH-05/MAH-16**



Specifications

Model	MAH-05	MAH-16
Rated Air Pressure	MPa (kgf/cm ²) 0.59 {6}	0.59 {6}
Air Consumption (No load)	m ³ /min 0.07	0.07
Stroke Speed	min ⁻¹ (rpm) 22,000	13,000
Stroke	mm 0.5	1.6
Shank diameter of file	mm 3 OD	3 OD
Mass (Weight)	kg 0.37	0.37

Diamond files (5pcs/set)

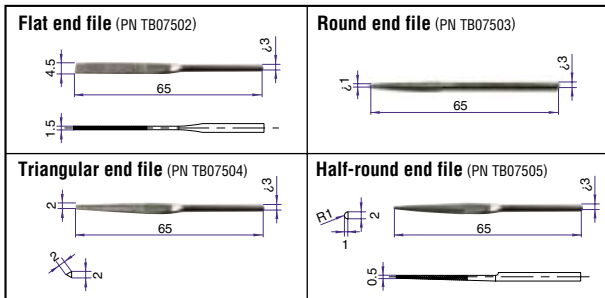

Standard Accessories	• Each 1pc. of diamond flat and round file • Hex. Wrench key 2 : 1pc. • Cupla Model HA-65SN : 1pc.
----------------------	---

Vice Holder (PN TB07506)

Grinding stone plates such as ceramic grinding stones in the market can be also mounted. (Max size: Thickness 3.2mm x Width 20mm)

Mounting examples

SUPER SAW

Special double-piston system achieved low vibration while cutting speed improved!!

Model **SSW-110**



SSW-110 has many feature on the followings.....

- Low vibration is achieved by the special design of double piston mechanism.
- New adoption of piston rings minimized power loss and improved cutting efficiency.
- Longer piston stroke improved cutting speed so much.
- Rear exhaust system for chip-scattering-free operation.
- New double-lock throttle lever prevents unintended.
- Cutting Capacity : Max. plate thickness 3mm (for Mild Steel)

Optional Accessories



PN	Part Name	Q'ty
TA9A005	32 mm Saw Blade	10 pcs.
TA9A011	24 mm Saw Blade	10 pcs.
TB00193	18 mm Saw Blade	10 pcs.
TB00192	14 mm Saw Blade	10 pcs.

Specifications

Model	SSW-110
Rated Air Pressure	MPa (kgf/cm ²) 0.59 {6}
Air Consumption (No load)	m ³ /min 0.29
Stroke Speed	min ⁻¹ 7,000
Stroke	mm 11
Mass (Weight)	kg 0.62

Standard Accessories	• 32 mm Saw Blade : 2 pcs. • 3 mm Hex. Socket Screw Key : 1 pc. • Bushing PT1/4 x NPT1/4 : 1 pc.
----------------------	--