

Model

**AL-55** High Speed Rotation 56,500 rpm 

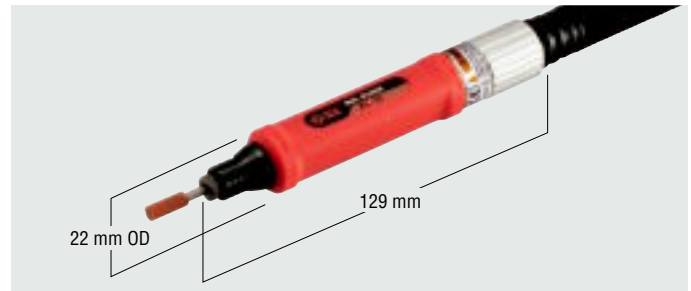
Grinding Stone (Optional)



• 5 dia. × 13 × 3 mm : 10 pcs./set



- Smooth high speed rotation and low vibration enables precision grinding
- Stepless speed change from 0 to 56,500 rpm meets a wide range of grinding applications
- Compact & light weight for comfortable operation over long periods of time
- Triangular grip fits operator's hand
- Special plastic grip prevents cold hands and absorbs vibration
- Rear exhaust system



## Specifications

Model	AL-55
Rated Air Pressure MPa {kgf/cm <sup>2</sup> }	0.6 {6}
Air Consumption (No load) m <sup>3</sup> /min	0.17
Free Speed min <sup>-1</sup> (rpm)	56,500
Size of Collet Chuck mm	3
Hose Size inch	1/4
Mass (Weight) kg	0.25

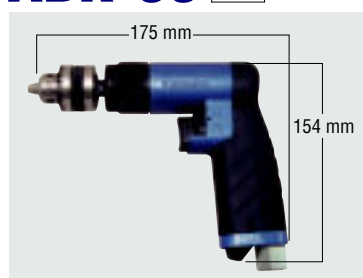
## Standard Accessories

- Mounted Wheel 5 × 13 × 3 : 1 pc.
- Spanner 7 × 9 : 1 pc.
- Bushing R 1/4 × NPT 1/4 : 1 pc.

# AIR DRILL

The power and performance you need to drill deeper and faster

Model

**ADR-65** 

Model

**ADR-100** 

## Specifications

Model	ADR-65	ADR-100
Rated Air Pressure MPa {kgf/cm <sup>2</sup> }	0.6 {6}	0.6 {6}
Air Consumption (No load) m <sup>3</sup> /min	0.55	0.67
Free Speed min <sup>-1</sup> (rpm)	2,900	2,000
Max. Drilling Capacity mm	6.5	10.0
Mass (Weight) kg	0.8	1.1

## Standard Accessories

- Drill Chuck : 1 pc. on the body
- Chuck Handle : 1 pc.
- Bushing R 1/4 × NPT 1/4 : 1 pc.
- 30SH : 1 pc.

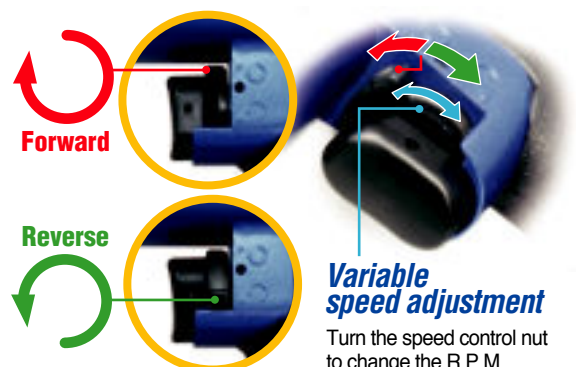
## Optional Accessory

- Hanger : 1 pc.
- \*A hanger to be mounted on the bottom of the grip is available as option.

- Built-in silencer
- Reversible
- Variable speed adjustment
- Rubber grip reduces chilled hand

**Reversible**

Change rotation direction by turning the valve as indicated.

**Variable speed adjustment**

Turn the speed control nut to change the R.P.M.