



# MICRO AIR HAND

Fine reciprocating motion best for precision parts filing

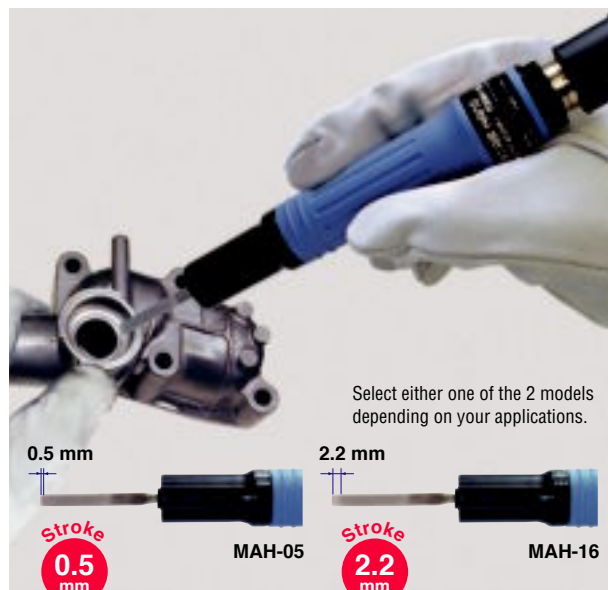

Diamond files (5 pcs/set)

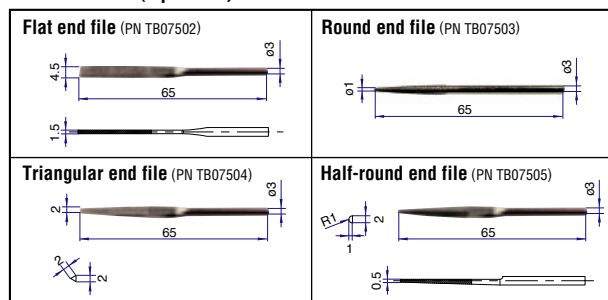

Model

**MAH-05/MAH-16**



## Specifications

Model	MAH-05	MAH-16
Rated Air Pressure	MPa {kgf/cm <sup>2</sup> } 0.6 {6}	
Air Consumption (No load)	m <sup>3</sup> /min 0.07	
Stroke Speed	min <sup>-1</sup> 22,000	11,000
Stroke	mm 0.5	2.2
Shank diameter of file	mm 3	
Mass (Weight)	kg 0.4	

## Standard Accessories

- Flat end file : 1 pc.
- Round end file : 1 pc.
- Bushing R1/4 × NPT 1/4 : 1 pc.
- Hex. Wrench key 2 : 1 pc.

## Vice Holder (PN TB07506)



Grinding stone plates such as ceramic grinding stones in the market can be also mounted.  
(Max size: Thickness 3.2 mm × Width 20 mm)

# SUPER SAW

Special double-piston system achieved low vibration while cutting speed improved!!

Model

**SSW-110**



## Optional Accessories



PN	Description	Qty
TA9A005	32 mm Saw Blade	10 pcs.
TA9A011	24 mm Saw Blade	10 pcs.
TB00193	18 mm Saw Blade	10 pcs.
TB00192	14 mm Saw Blade	10 pcs.

SSW-110 has many features on the followings.....

- Low vibration is achieved by the special design of double piston mechanism
- New adoption of piston rings minimized power loss and improved cutting efficiency
- Optimized blade stroke for maximum cutting performance
- Rear exhaust system for chip-scattering-free operation
- New double-lock throttle lever prevents unintended start
- Cutting Capacity : Max. plate thickness 3 mm (for Mild Steel)

## Specifications

Model	SSW-110
Rated Air Pressure	MPa {kgf/cm <sup>2</sup> } 0.6 {6}
Air Consumption (No load)	m <sup>3</sup> /min 0.29
Stroke Speed	min <sup>-1</sup> 7,000
Stroke	mm 11
Mass (Weight)	kg 0.62

## Standard Accessories

- 32 mm Saw Blade : 2 pcs.
- 3 mm Hex. Socket Screw Key : 1 pc.
- Bushing R 1/4 × NPT 1/4 : 1 pc.