



AIR SHOT-HAMMER

These shot-hammers simplify and quicken various inserting jobs of pins, bushings, collar caps, oil seals, bearings, etc. in assembly lines.

● RH, CB Type




CB13S







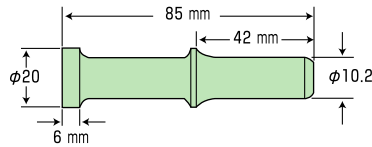


Punching a hole on a rubber sheet.

RVS85

Standard rivet snap.



Air pressure 0.5~0.7MPa

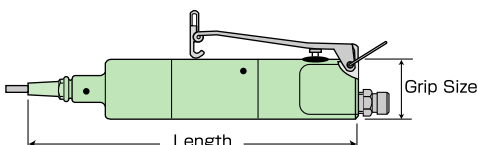			Remarks
Grip size	φ 37 mm	RH20	<p>Single blow</p> <p>(Each operation of the lever generates one blow)</p>
Air consumption	220 cm ³ /stroke		
Blowing power	(Approx.) 2.25 N-m	Overall length : 213 mm Weight : 900 g	
Grip size	φ 45 mm	RH80	
Air consumption	650 cm ³ /stroke		
Blowing power	(Approx.) 3.13 N-m	Overall length : 254 mm Weight : 1,300 g	
Grip size	φ 43 mm	RH90	<p>Single blow</p> <p>(Heavy duty type)</p> <p>It can be used for stamping, riveting and chipping, by changing the attachments.</p>
Air consumption	1,200 cm ³ /stroke		
Blowing power	(Approx.) 5.88 N-m	Overall length : 328 mm Weight : 1,600 g	
Grip size	φ 43 mm	RH100Z (Heavy-duty)	
Tank size	φ 72 mm		
Blowing power	(Approx.) 8.82 N-m	Overall length : 330 mm Weight : 2,100 g	
Grip size	φ 51 mm	RH200 (Heavy-duty)	<p>Small sized type</p> <p>(Each operation of the lever generates one blow)</p>
Tank size	φ 86 mm		
Air consumption	2,500 cm ³ /stroke	Overall length : 341 mm Weight : 2,100 g	
Length	175 mm	CB13S (Small-size)	
Weight	310 g		
Grip size	φ 30 mm		
Air consumption	54 cm ³ /stroke	CB13L	
Length	215 mm		
Weight	500 g		
Grip size	φ 36 mm		
Air consumption	64 cm ³ /stroke		

Air pressure 0.5~0.6MPa